

June 7, 2022



New Gen Drive-Aways

Ka-74G	4
Ka-74H	6
Ka-75V	8
980+	10
Ka-98G	12
Ka-98V	14
Ka-98H/Jup	16
1202	18
Ka-1202V	20
Ka-1202G	22
1501	24
1801	26

Classic Drive-Aways

1200	30
1500	32

Fly-Aways

FLY-74G	36
FLY-74H	38
FLY-75V	40
FLY-981	42
FLY-98G	44
FLY-98V	46
FLY-98H	48
ACFLY-1200	50
FLY-1202	52
FLY-1202V	54
FLY-1202G	56
FLY-1801	58

ManPacks

MP-60-MOT	62
MP-80-MOT	64
MP-100-MOT	66

FMA's (Fixed Motorized)

FMA-120	70
FMA-120Ka	72
FMA-180+	74
FMA-241	76

Controllers & Accessories

7000/7024 Controller	80
7710 Controller	82
3000 Controller	84
Beacon Receiver	85
BR400L	85
PowerSmart	86
Transportable Cases	88
Climate-Controlled AC Case	90
Enclosed Skid	93
Cables	94

Vertical Markets

Vertical Markets	95
Antenna Approvals	96

Matrix (Specification Chart)

Matrix	97
--------------	----



New Gen DRIVEAWAY ANTENNAS



NewGen Drive-Aways

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Ka-74G



Ka-74H



Ka-75V



980+



Ka-98G



Ka-98V



Ka-98H/Jup



1202



Ka-1202V



Ka-1202G



1501



1801



C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

Ka-74G



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-74G Drive-Away Antenna is a 74 cm auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere.



Approved On Eutelsat Konnect Services

Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm capable of supporting up to 5 kg (10 lbs) RF Tranceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial Ka modems and services
- 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Supports Global Invacom & Gilat Ka-band Transceivers
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band, the Ka-74G system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

Ka-74G

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	74cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 90°
Polarization	Circular, Auto-switching (RH or LH)
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4/502.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Appendix A, Water Ingress per IP-66

Electrical

Rx & Tx Cable	2 RG6 cables - 10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)		
3W-XRF	17.80 - 20.20	29.00 - 30.00
Konnect 3W-XRF	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8025	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8023	17.70 - 20.20	28.10 - 29.10
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.5 dBi)	41.6 @19.2 GHz	45.3 @29.0 GHz
Antenna Noise Temp. (K)	30° EL= 50 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < Ø < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10 (typical)	
Cross-Polarization	> 23 dB	> 25 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from Transceiver to Base Connector

Physical

Mounting Plate	L: 131 cm	(51.6")
	W: 45 cm	(17.7")
Stowed Reflector Ext. Dims	L: 145 cm	(57")
	W: 76 cm	(29.9")
	H: 30 cm	(11.8")
Deployed Height	122 cm	(48")
Platform Weight	52 kg	(115 lbs)

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

System, with controller and standard set of cables, accessories
Crate (including Reflector, Feed/Transceiver):
185.5 cm × 112 cm × 68.5 cm (73" × 44" × 27"), 127 kg (280 lbs)
Crate (no Reflector, no Feed/Transceiver):
185.5 cm × 112 cm × 68.5 cm (73" × 44" × 27"), 118 kg (260 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



Ka-74H



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-74H Drive-Away Antenna is a 74 cm auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere.



Compliant for use on HNS Jupiter Satellite Services

Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm supports Jupiter radios
- Designed to work with the iNetVu® 7710 Controller
- Works with HNS Jupiter services
- 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Supports Global Invacom 74cm Ka antenna
- Standard 2 year warranty

Application Versatility

If you operate in Ka-band, the Ka-74H system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



Ka-74H

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	74cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 90°
Polarization	Circular, Auto-switching (RH or LH)
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4/502.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Appendix A, Water Ingress per IP-66

Electrical

Rx & Tx Cable	RG6 cable - 10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	17.70 - 20.20	28.0 - 30.0
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.5 dBi)	41.6 @19.2 GHz	45.3 @29.0 GHz
Antenna Noise Temp. (K)	30° EL= 50 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < Ø < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10 (typical)	
Cross-Polarization	> 23 dB	> 25 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from Transceiver to Base Connector

Physical

Mounting Plate	L: 131 cm	(51.6")
	W: 45 cm	(17.7")
Stowed Reflector Ext. Dims	L: 145 cm	(57")
	W: 76 cm	(29.9")
	H: 30 cm	(11.8")
Deployed Height	122 cm	(48")
Platform Weight	52 kg	(115 lbs)

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

System, with controller and standard set of cables, accessories
Crate (including Reflector, Feed/Transceiver):
185.5 cm × 112 cm × 68.5 cm (73" × 44" × 27"), 127 kg (280 lbs)
Crate (no Reflector, no Feed/Transceiver):
185.5 cm × 112 cm × 68.5 cm (73" × 44" × 27"), 118 kg (260 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

Ka-75V



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-75V Drive-Away Antenna is a 75 cm auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7024C Controller providing fast satellite acquisition within minutes, anytime anywhere.

"Authorized for use on ViaSat Exede® Enterprise and on KA-SAT NEWSPOTTER NEWSGATHERING service by Eutelsat"



Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm now supports both type of Transceivers: Standard Tria and new eTRIA
- Designed to work with the iNetVu® 7024C Controller
- Works seamlessly with the world's emerging commercial ViaSat/KA-SAT satellite Surfbeam II/PRO Auto-acquire modems
- Auto beam select on KA-SAT Tooway services
- 2 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Supports Global Invacom 75 cm Ka antenna
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band, the Ka-75V system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation mobile Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

http://www.eutelsat.com/files/contributed/support/pdf/Eutelsat_Broadband_Services.pdf (p.12)
<http://www.eutelsat.com/files/contributed/products/pdf/KA-SAT-SNG-terminals.pdf>



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

Ka-75V

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	75cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna
	Compass $\pm 2^\circ$
	Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 90°
Polarization	Circular, Auto-switching
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4/502.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Appendix A, Water Ingress per IP-66

Electrical

Rx & Tx Cable	2 RG6 cables - 10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	18.30 - 20.20	28.10 - 30.00
Feed Interface (Circular)	RG6	RG6
Nominal G/T	17.5 dB/K	
Nominal EIRP	48.4 dBW	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from Transceiver to Base Connector

Physical

Mounting Plate	L: 131 cm	(51.6")
	W: 45 cm	(17.7")
Stowed Reflector Ext. Dims	L: 145 cm	(57")
	W: 76 cm	(29.9")
	H: 30 cm	(11.8")
Deployed Height	122 cm	(48")
Platform Weight	52 kg	(115 lbs)


Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

System, with controller and standard set of cables, accessories
Crate (including Reflector, Feed/Transceiver):
185.5 cm × 112 cm × 68.5 cm (73" × 44" × 27"), 127 kg (280 lbs)
Crate (no Reflector, no Feed/Transceiver):
185.5 cm × 112 cm × 68.5 cm (73" × 44" × 27"), 118 kg (260 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



980+

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® 980+ Drive-Away Antenna is a 98 cm Ku-band auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7024C Controller providing fast satellite acquisition within minutes, anytime anywhere.



980+ Stowed (with pod option)


Field Upgradable to Ka-98G or Ka-98V

Features

- One-Piece high surface accuracy, offset feed, SMC reflector
- Heavy duty feed arm capable of supporting up to 5Kg (10 lbs) RF Electronics (LNB & BUC)
- Designed to work with the iNetVu® 7024C Controller
- Works seamlessly with the world's most popular commercially available Ku modems and services
- Field Upgradable to Ka-98G or Ka-98V
- 3 Axis motorization
- Supports manual control when desired
- Supports hand cranks when required
- One button, auto-pointing controller acquires any Ku satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Based on GD 98 cm reflector with cross-pol feed
- Available with pod option
- Standard 2 year warranty

Application Versatility

If you operate in Ku, the 980+ system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. The system is also field upgradable to Ka-band. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



980+

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Antenna SMC reflector, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna
	Compass $\pm 2^\circ$
	Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Polarization	$\pm 90^\circ$
Elevation	0 - 90°
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)
Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures	
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked	
Shock Test per IEC 60068-2-27, Water Ingress per IP-66	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U F Type / N Type (optional)
Axis transition	Twist-Flex Waveguide

Physical

Mounting Plate	L: 156 cm (61.5")	W: 45 cm (17.7")
Stowed Reflector Ext. Dims (without pod)	L: 173 cm (68.0")	W: 99 cm (39.0")
	H: 33.4 cm (13.1")	
Stowed Reflector Ext. Dims (with pod)	L: 185 cm (73.2")	W: 114.5 cm (45")
	H: 33.4 cm (13.1")	
Deployed Height	151 cm (59.5")	
Platform Weight	54 kg (119 lbs)	
Pod weight alone	6.8 kg (15 lbs)	
Platform Weight (without pod)	54 kg (119 lbs)	
Platform Weight (with pod)	60.8 kg (134 lbs)	

Electrical

Rx & Tx Cables	2 RG6 cables -10 m (33 ft) each
Control Cables	
Standard	10 m (33 ft) Ext. Cable
Optional	up to 60 m (200 ft) available

Ku-band (Linear)

Transmit Power	1 to 200 Watt
Receive Frequency (GHz)	10.70 - 12.75 ⁽¹⁾
Optional	10.70 - 11.70
Transmit Frequency (GHz)	13.75 - 14.50
Optional	12.75 - 14.50
Midband Gain (± 0.2 dB)	
(Rx)	39.80@12.00 GHz
(Tx)	41.30@14.30 GHz
Antenna Noise Temp. (K)	10° EL=53
	20° EL= 39
	30° EL= 32 Max.
Sidelobe Envelope, Co-Pol (dBi)	
100λ/D < θ < 20°	29 - 25 Log θ
20° < θ < 26.3°	-3.5
26.3° < θ < 48°	32 - 25 Log θ
48° < θ < 180°	-10 (typical)

Cross-Polarization

Standard feed:	
Within 1 dB contour:	-30dB (Max.)
Any Angle off Axis:	-25 dB (Max.)
Optional Eutelsat Feed:	
Within 1 dB contour	< 30dB (Min.)
VSWR Rx	1.3:1
VSWR Tx	1.3:1

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

iNetVu 980+ system, controller and standard set of cables, accessories
 Mount Crate: 186 cm × 112 cm × 69 cm (73" × 44" × 27"), 136 kg (300 lbs)
 POD box: 127cm × 41cm × 127cm (50" × 16" × 50"), 23 kg (50 lbs)
 Total Weight with POD: 159kg (350lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Note:

⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz

C-COM
 SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

11

Ka-98G



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-98G Drive-Away Antenna is a 98 cm auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere.



Ka-98G Stowed (with pod option)

**Avanti Approved & Thor7 Type Approved;
Field Upgradeable to Ku-band**

Features

- One-Piece high surface accuracy, offset feed, SMC reflector
- Heavy duty feed arm capable of supporting up to 5kg (10 lbs) RF transceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's most popular commercially available Ka modems and services
- 2 Axis motorization (3 Axis Optional)
- Supports manual control when required
- One button, auto-pointing controller acquires any Ka-band satellite within 2 minutes
- Field upgradable to Ku-band
- Locates satellites using the most advanced satellite acquisition methods
- Supports Global Inacom 98 cm Ka antenna and 3W transceiver
- Avanti Approved; Thor7 Type Approved; also compliant with Gilat/iDirect/Newtec Ka services
- Available with pod option
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band, the Ka-98G system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

<http://www.avantiplc.com/avanti-approved-compatibility>



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 90°
Polarization	LHCP/RHCP (Motorized Option Available)
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Water Ingress per IP-66

Electrical

Rx & Tx Cables	2 RG6 cables -10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)		
3W-XRC	19.20 - 20.20	29.50 - 30.00
(Optional) 3W-XRF	17.80 - 20.20	29.00 - 30.00
(Optional) 4W - AN8025	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8023	17.70 - 20.20	28.10 - 29.10
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.2 dBi)	44.10 @19.25 GHz	47.60 @29.15 GHz
Antenna Noise Temp. (K)	10° EL= 88; 20° EL= 62; 30° EL= 51 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10 (typical)	
Cross-Polarization (1dB Cantour)	> -25 dB	> -25 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from Transceiver to Base Connector

Physical

Mounting Plate	L: 161 cm (63.5")	W: 45 cm (17.7")
Stowed Reflector Ext. Dims (without reflector pod)	L: 170 cm (66.9")	W: 100 cm (39.5")
Stowed Reflector Ext. Dims (with reflector pod)	L: 178.8 cm (70.4")	W: 113 cm (44.5")
Deployed Height	151 cm (59.5")	
Platform Weight	54 kg (119 lbs)	
Reflector back cover	2.27 kg (5 lbs)	
Pod alone	6.8 kg (15 lbs)	
Total Platform Weight (without reflector pod)	56.3 kg (124 lbs)	
Total Platform Weight (with reflector pod)	63 kg (139 lbs)	

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Crate: 183 cm x 109 cm x 66 cm (72" x 43" x 26"), 52 kg (114 lbs)
Platform: 54 kg (119 lbs)
7710 Controller: 6 kg (13 lbs)
Cables: 5 kg (11 lbs)

Total weight without pod: 117 kg (258 lbs)

Pod inside shipping box:
33 cm x 127 cm x 127 cm (13" x 50" x 50"), 16.1 kg (35.5 lbs)

Transportable Case includes Platform (Optional):
Platform Case: 183 cm x 109 cm x 47 cm (72" x 43" x 18.5"), 133.5 kg (294 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Ka-98V



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-98V Drive-Away Antenna is a 98 cm auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere.

Eutelsat Type Approved for Broadband Services



Features

- One-Piece high surface accuracy, offset feed, SMC reflector
- Heavy duty feed arm supports new eTRIA Transceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial ViaSat / KA-SAT satellite Surfbeam II modems
- Eutelsat Type Approved for Broadband Services*
- Auto beam select on KA-SAT Tooway services
- 2 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires any Ka-band satellite within 2 minutes
- Field upgradable to Ku-band
- Locates satellites using the most advanced satellite acquisition methods
- Supports Global Invacom 98cm Ka antenna
- Available with pod option
- Standard 2 year warranty



Stowed (with pod option)

Application Versatility

If you operate in Ka-band, the Ka-98V system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation mobile Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna
	Compass $\pm 2^\circ$
	Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 90°
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Water Ingress per IP-66

Electrical

Rx & Tx Cables	2 RG6 cables -10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	18.30 - 20.20	28.10 - 30.0
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.2 dBi)	43.50 @19.75 GHz	46.60 @29.75 GHz
Antenna Noise Temp. (K)	30° EL= 62 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < Ø < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10 (typical)	
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from Transceiver to Base Connector

Physical

Mounting Plate	L: 161 cm (63.5")	W: 45 cm (17.7")
Stowed Reflector Ext. Dims (without reflector pod)	L: 170 cm (66.9")	W: 100 cm (39.5")
Stowed Reflector Ext. Dims (with reflector pod)	L: 178.8 cm (70.4")	W: 113 cm (44.5")
Deployed Height	151 cm (59.5")	
Platform Weight	54 kg (119 lbs)	
Reflector back cover	2.27 kg (5 lbs)	
Pod alone	6.8 kg (15 lbs)	
Total Platform Weight (without reflector pod)	56.3 kg (124 lbs)	
Total Platform Weight (with reflector pod)	63 kg (139 lbs)	

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Crate: 183 cm x 109 cm x 66 cm (72"x 43"x 26"), 52 kg (114 lbs)
Platform: 54 kg (119 lbs)
7710 Controller: 6 kg (13 lbs)
Cables: 5 kg (11 lbs)

Total weight without pod: 117 kg (258 lbs)

Pod inside shipping box:
33 cm x 127 cm x 127 cm (13" x 50" x 50"), 16.1 kg (35.5 lbs)

Transportable Case includes Platform (Optional):
Platform Case: 183 cm x 109 cm x 47 cm (72"x 43"x 18.5"), 133.5 kg (294 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Ka-98H/Jup

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® Ka-98H/Jup Drive-Away Antenna is a 98 cm auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere.

"Approved for operation on Hughes JUPITER System"



Features

- One-Piece high surface accuracy, offset feed, SMC reflector
- Heavy duty feed arm capable of supporting up to 5kg (10 lbs) RF Electronics (LNB & BUC) or transceiver
- Designed to work with the iNetVu® 7710 Controller
- Adapted to operate on HNS Jupiter based Network Technology
- 2 or 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires any Ka-band satellite within 2 minutes
- Field upgradable to Ku-band
- Locates satellites using the most advanced satellite acquisition methods
- Supports GD/HNS 98cm Ka antenna
- Works with HNS Jupiter (NA)(1), YAHSA (MENA)(1) and Avanti(1)
- Standard 2 year warranty

HUGHES

Application Versatility

If you operate in Ka-band, the Ka-98H/Jup system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

16

Ka-98H/Jup

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, Offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor ± 0.1
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 90°
Elevation Deploy Speed	Variable, 10°/sec typ.
Azimuth Deploy Speed	Variable, 10°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Survival	
Wind Deployed	160 km/h (100 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Operational	
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Water Ingress per IP-66

Electrical

IFL Cable	1 RG6 cable - 10 m (33 ft)	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	19.20 - 20.20	29.50 - 30.00
Feed Interface (Circular)	RG6	RG6
Midband Gain (± 0.2 dBi)	43.50 @ 19.75 GHz	46.60 @ 29.75 GHz
Antenna Noise Temp. (K)	30° EL = 62 Max.	
Sidelobe Envelope, Co-Pol (dBi)		
100λ / D < Ø < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10 (typical)	
Cross-Polarization	> -24 dB	> -22 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm ⁽¹⁾
Coaxial	RG6U from Transceiver to Base Connector

Physical

Mounting Plate	L: 151 cm (59.5")	W: 45 cm (17.7")
Stowed Reflector Ext. Dims	L: 173 cm (68.1")	W: 100 cm (39.5")
	H: 30 cm (11.8")	
Deployed Height	151 cm (59.5")	
Platform Weight	54 kg (119 lbs)	

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Crate: 183 cm x 109 cm x 66 cm (72" x 43" x 26"), 52 kg (115 lbs)
Platform: 54 kg (119 lbs)
7710 Controller: 6 kg (13 lbs)
Cables: 5 kg (11 lbs)

Total weight: 117 kg (258 lbs)

Transportable Case Option:

Base Case: 183 cm x 109 cm x 47 cm (72" x 43" x 18.5"), 133.5 kg (294 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

(1) Supported Radios: Jupiter Radios motorized with Rotary Joint



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

1202

iNetVu®
by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® 1202 Drive-Away antenna system is a sleek, simple to operate auto-deploy VSAT terminal which can be mounted on the roof of a vehicle. It is suitable for the most demanding applications. Its reflector optics feature a long focal length for excellent cross-pol performance. All three motorized axes have very low backlash and work together seamlessly with sophisticated integral sensors and the iNetVu® 7710 Controller to ensure excellent pointing accuracy.



Field Upgradable to Ka-Band

Features

- 1.2m Offset, prime focus, thermoset-molded reflector with back cover
- Low stow height, high-precision
- 35 dB crosspol for large carrier uplinking
- Patented sleek aerodynamic form (Patent # D696649 & D696650)
- Designed to work with the iNetVu® 7710 Controller
- Supports hand cranks when required
- One button, auto-pointing controller acquires any Ku-band satellite within 2 minutes (<3 minutes with Beacon Receiver)
- Optimal high-precision antenna pointing
- Includes jog controller functions
- Remote access and operation via network, web and other interfaces
- Modular design makes all major aspects of the antenna field serviceable
- Supports Skyware 1.2m antenna, Type 125
- Wind deflector pod (optional)
- 2-piece thermoset-molded reflector (optional)
- Compliant with Eutelsat* and Intelsat
- Standard 2 year warranty

Application Versatility

The 1202 drive-away system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up typically for industries such as SNG, Disaster Management, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.

* Static performance: http://www.eutelsat.com/files/contributed/support/pdf/RF_Characterisation.pdf
Auto-pointing performance: http://www.eutelsat.com/files/contributed/satellites/pdf/Autopointing_Antennas.pdf



1202

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector Size & Material	1.2m Glass fibre reinforced polyester ⁽¹⁾
Platform Geometry	Elevation over Azimuth
Offset Angle	16.97°
Antenna Optics	One-piece offset feed, prime focus
Azimuth Travel	± 200°
Elevation Look Angle	0° to 90°
Polarization Travel	± 95°
Elevation Deploy Speed	2°/sec
Azimuth Deploy Speed	6°/sec
Peaking Speed	0.2°/sec
Motor Voltage	24 VDC 10 Amp (Max.)

Environmental

Wind loading	
Operational	75 km/h (46.5 mph)
Survival	
Deployed	112 km/h (70 mph)
Stowed	225 km/h (140 mph)
Temperature	
Operational	-30° to 55° C (-22° to 131° F)
Survival	-40° to 65° C (-40° to 149° F)
Solar Radiation	360 BTU/h/sq. ft.
Rain	1.3 cm/h (0.51 in/h)
Humidity	0-100% (condensing)
Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures	
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked	
Shock Test per IEC 60068-2-27	

Electrical

Rx & Tx Cables	2 RG6 Cables - 10 m (33 ft) each
Control Cables	
Standard	10 m (33 ft) Extension Cable
Optional	Up to 30 m (100 ft) available

RF Interface

Radio Mounting	Feed arm/Inside vehicle
Coaxial	RG6U F Type
	N Type (optional)
Axis transition	Twist-Flex Waveguide

Physical

Stowed dimensions (without pod)	L: 203 cm (79.9")	W: 124 cm (48.8")
	H: 35 cm (13.8")	
Stowed Dimensions (with pod)	L: 225 cm (88.5")	W: 135 cm (53.2")
	H: 35 cm (13.8")	
Reflector Weight (including back cover)	16 kg (35.2 lbs)	
Total Platform Weight (without pod)	82 kg (180 lbs)	
Total Platform Weight (with pod)	88 kg (193 lbs)	

Ku (Linear)

Transmit Power	1 to 200 watt ⁽²⁾	
Feed	2 Port XPol	
	Receive	Transmit
Frequency (GHz)	10.70 - 12.75 ⁽³⁾	13.75 - 14.50
(Optional)	10.70 - 11.70	12.75 - 14.50
Feed Interface	WR75	WR75
Midband Gain Co-Pol (± 0.2dBi)	41.80	43.30
Antenna Noise Temp. (K)	10° EL = 45 / 30° EL = 24	
Sidelobe Envelope, Co-Pol (dBi)		
1.5° < θ < 20°	29-25 Log θ	
20° < θ < 26.3°	-3.5	
26.3° < θ < 48°	32-25 Log θ	
48° < θ < 180°	-10 (Typical)	
Cross-Polarization on Axis	> 35 dB	
Within 1dB Beamwidth	> 30 dB	
Tx/Rx Isolation	> 40 dB	90 dB
VSWR	1.3:1	1.3:1

Shipping Weights & Dimensions*

Platform Crated: 211 cm x 41 cm x 61 cm (83" x 16" x 24"), 121 kg (267 lbs)
Reflector Crate: 142 cm x 15 cm x 130 cm (56" x 6" x 51"), 22 kg (48 lbs)
Pod: 160 cm x 15 cm x 140 cm (63" x 6" x 55"), 12 kg (27 lbs)
Total Weight without pod: 143 kg (315 lbs)
Total Weight with pod: 155 kg (342 lbs)

Transportable Case Options:

Platform: 211 cm x 65 cm x 45 cm (83" x 25.75" x 17.75") 132 kg (290 lbs)
Reflector: 1- piece:
127 cm x 122 cm x 20 cm (50" x 48" x 8"), 45.5 kg (100 lbs)
Reflector: 2- piece: (Optional)
132 cm x 31 cm x 76 cm (52" x 12" x 30"), 34 kg (74 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

- ⁽¹⁾ Antenna based on Skyware, Model 125
- ⁽²⁾ Depending on size and weight for feed arm mounting limitation, Eutelsat Characterized up to 40 watt BUC with Tx XPD > 25 dB within 1 dB Contour
- ⁽³⁾ LNB PLL Type required with stability better than ± 25 KHz

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

C-COM
SATELLITE SYSTEMS INC.

Ka-1202V



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-1202V Drive-Away antenna system is a sleek, simple to operate auto-deploy VSAT terminal which can be mounted on the roof of a vehicle. It is suitable for the most demanding applications. All axes have very low backlash and work together seamlessly with sophisticated integral sensors and the iNetVu® 7710 Controller to ensure excellent pointing accuracy.



Field Upgradable to Ku-Band

Features

- 1.2m Offset, prime focus, thermoset-molded reflector with back cover
- Low stow height
- Designed to work with the iNetVu® 7710 Controller
- Supports hand cranks when required
- One button, auto-pointing controller acquires ViaSat or KA-SAT Ka-band satellite within 2 minutes
- Optimal high-precision antenna pointing
- Includes jog controller functions
- Remote access and operation via network, web and other interfaces
- Modular design makes all major aspects of the antenna field serviceable
- Supports ViaSat/General Dynamics 1.2m Ka antenna
- 2-piece thermoset-molded reflector (optional)
- Compliant with commercial Ka Services (Exede & toowayTM)
- Standard 2 year warranty



Application Versatility

The Ka-1202V drive-away system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up typically for industries such as SNG, Disaster Management, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.



Ka-1202V

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector Size & Material	1.2m Glass Fibre Reinforced Polyester SMC ⁽¹⁾
Platform Geometry	Elevation over Azimuth
Offset Angle	N/A
Antenna Optics	One-piece offset feed, prime focus
Azimuth Travel	± 200°
Elevation Look Angle	0° to 90°
Elevation Deploy Speed	2°/sec
Azimuth Deploy Speed	6°/sec
Peaking Speed	0.2°/sec
Motor Voltage	24 VDC 10 Amp (Max.)

Environmental

Wind loading	
Operational	72 km/h (45 mph)
Survival	
Deployed	112 km/h (70 mph)
Stowed	225 km/h (140 mph)
Temperature	
Operational	-30° to 55° C (-22° to 131° F)
Survival	-40° to 65° C (-40° to 149° F)
Solar Radiation	360 BTU/h/sq. ft.
Rain	1.3 cm/h (0.51 in/h)
Humidity	0-100% (condensing)

Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27

Electrical

Rx & Tx Cables	Single IFL, RG6 cable - 10 m (33 ft)
Control Cables	
Standard	10 m (33 ft) Extension Cable
Optional	Up to 30 m (100 ft) available

RF Interface

Radio Mounting	Feed arm/Inside vehicle
Coaxial	RG6U F type

Physical

Stowed dimensions	L: 203 cm (79.9") W: 124 cm (48.8")
	H: 35 cm (13.8")
Reflector Weight (including back cover)	16 kg (35.2 lbs)
Total Platform Weight	82 kg (180 lbs)

Ka-band

	Receive	Transmit
Frequency (GHz)	19.70 - 20.20	29.50 - 30.00
Midband Gain Co-Pol (± 0.2dBi)	46.50	49.60
G/T	23.6 dB/K	
Antenna Noise Temp. (K)	20° EL = 107 / 40° EL = 89	
Sidelobe Envelope, Co-Pol (dBi)		
1.5° < θ < 20°	29-25 Log θ	
20° < θ < 26.3°	-3.5	
26.3° < θ < 48°	32-25 Log θ	
48° < θ < 180°	-10 (Typical)	
Cross-Pol Within 1dB BW	>22.0 dB	>22.0 dB
VSWR	1.3:1	1.3:1

Shipping Weights & Dimensions*

Platform Crated: 211 cm x 41 cm x 61 cm (83" x 16" x 24"), 121 kg (267 lbs)
Reflector Crate: 142 cm x 15 cm x 130 cm (56" x 6" x 51"), 22 kg (48 lbs)
Total Weight: 143 kg (315 lbs)

Transportable Case Options:

Platform: 211 cm x 65 cm x 45 cm (83" x 25.75" x 17.75") 132 kg (290 lbs)
Reflector: 1- piece:
127 cm x 122 cm x 20 cm (50" x 48" x 8"), 45.5 kg (100 lbs)
Reflector: 2- piece: (Optional)
132 cm x 31 cm x 76 cm (52" x 12" x 30"), 34 kg (74 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

⁽¹⁾ Antenna based on General Dynamics

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

21

Ka-1202G



TECHNICAL SPECIFICATIONS

The iNetVu® Ka-1202G Drive-Away antenna system is a sleek, simple to operate auto-deploy VSAT terminal which can be mounted on the roof of a vehicle. It is suitable for the most demanding applications. All axes have very low backlash and work together seamlessly with sophisticated integral sensors and the iNetVu® 7710 Controller to ensure excellent pointing accuracy.

Field Upgradable to Ku-Band

Features

- 1.2m Offset, prime focus, thermoset-molded reflector with back cover
- Low stow height
- Designed to work with the iNetVu® 7710 Controller
- Supports hand cranks when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Optimal high-precision antenna pointing
- Includes jog controller functions
- Remote access and operation via network, web and other interfaces
- Modular design makes all major aspects of the antenna field serviceable
- Supports General Dynamics 1.2m Ka antenna
- 2-piece thermoset-molded reflector (optional)
- Compliant with commercial Ka Services (Avanti/Gilat)
- Optional 3W & 5W transceivers; higher BUCs also supported
- Standard 2 year warranty



Application Versatility

The Ka-1202G drive-away system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up typically for industries such as SNG, Disaster Management, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.



Ka-1202G

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector Size & Material	1.2m Glass Fibre Reinforced Polyester SMC ⁽¹⁾
Platform Geometry	Elevation over Azimuth
Offset Angle	N/A
Antenna Optics	One-piece offset feed, prime focus
Azimuth Travel	± 200°
Elevation Look Angle	0° to 90°
Elevation Deploy Speed	2°/sec
Azimuth Deploy Speed	6°/sec
Peaking Speed	0.2°/sec
Motor Voltage	24 VDC 10 Amp (Max.)

Environmental

Wind loading	
Operational	72 km/h (45 mph)
Survival	
Deployed	112 km/h (70 mph)
Stowed	225 km/h (140 mph)
Temperature	
Operational	-30° to 55° C (-22° to 131° F)
Survival	-40° to 65° C (-40° to 149° F)
Solar Radiation	360 BTU/h/sq. ft.
Rain	1.3 cm/h (0.51 in/h)
Humidity	0-100% (condensing)

Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27

Electrical

Rx & Tx Cables	2 RG6 cables
Control Cables	
Standard	10 m (33 ft) Extension Cable
Optional	Up to 30 m (100 ft) available

RF Interface

Radio Mounting	Feed arm/Inside vehicle
----------------	-------------------------

Physical

Stowed dimensions (48.8") (13.8")	L: 203 cm (79.9") W: 124 cm H: 35 cm
Reflector Weight (including back cover)	16 kg (35.2 lbs)
Total Platform Weight	82 kg (180 lbs)

Ka-Band

	Receive	Transmit
Frequency (GHz)		
3W-XRC	19.20 - 20.20	29.50 - 30.00
(Optional) 3W-XRF	17.80 - 20.20	29.00 - 30.00
(Optional) 4W - AN8025	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8023	17.70 - 20.20	28.10 - 29.10
Midband Gain (± .2dB)	46.5	49.9
EIRP (Nominal)	54 dBW @ 29.75 GHz	
G/T (Nominal)	23.6 dB/K @ 19.95 GHz	
Antenna Noise Temp. (K)	20° EL= 107 / 40° EL= 89	
Sidelobe Envelope Co-Pol (dBi)		
1.5° <Θ < 20°	29-25 LogΘ	
20° <Θ < 26.3°	-3.5	
26.3° <Θ < 48°	32-25 LogΘ	
48° <Θ < 180°	-10 Typical	
Cross Pol within 1dB contour	> 22 dB	> 22 dB
VSWR	1.3:1 (Max.)	

Ka-Band (R/O Circular)

	Receive
Frequency (GHz)	17.0 - 22.2
Feed Interface	WR42

Shipping Weights & Dimensions*

Platform Crated: 211 cm x 41 cm x 61 cm (83" x 16" x 24"), 121 kg (267 lbs)
Reflector Crate: 142 cm x 15 cm x 130 cm (56" x 6" x 51"), 22 kg (48 lbs)
Total Weight: 143 kg (315 lbs)

Transportable Case Options:

Platform: 211 cm x 65 cm x 45 cm (83" x 25.75" x 17.75") 132 kg (290 lbs)
Reflector: 1- piece:
127 cm x 122 cm x 20 cm (50" x 48" x 8"), 45.5 kg (100 lbs)
Reflector: 2- piece: (Optional)
132 cm x 31 cm x 76 cm (52" x 12" x 30"), 34 kg (74 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

⁽¹⁾ Antenna based on General Dynamics/Skyware Global

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

23

1501

iNetVu®
by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® 1501 Drive-Away antenna system is a sleek, simple to operate auto-deploy VSAT terminal which can be mounted on the roof of a vehicle. It is suitable for the most demanding applications. Its reflector optics feature a long focal length for excellent cross-pol performance. All three motorized axes have very low backlash and work together seamlessly with sophisticated integral sensors and the iNetVu® 7710 Controller to ensure excellent pointing accuracy.



Features

- 1.5m Offset, prime focus, carbon fibre reflector
- Low stow height
- 35 dB crosspol for large carrier uplinking
- Designed to work with the iNetVu® 7710 Controller
- Supports hand cranks when required
- Supports up to 200W Redundant BUC directly on feed arm
- One button, auto-pointing controller acquires any satellite within 2 minutes
- Optimal high-precision antenna pointing
- Includes jog controller functions
- Remote access and operation via network, web and other interfaces
- Modular design makes all major aspects of the antenna field serviceable
- Standard 2 year warranty

Application Versatility

The 1501 drive-away system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up typically for industries such as SNG, Disaster Management, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

1501

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector Size & Material	1.5m Carbon Fibre
Platform Geometry	Elevation over Azimuth
Offset Angle	16.97°
Antenna Optics	One-piece offset feed, prime focus
Azimuth Travel	± 200°
Elevation Look Angle	0° to 90°
Polarization Travel	± 95°
Elevation Deploy Speed	2°/sec
Azimuth Deploy Speed	6°/sec
Peaking Speed	0.2°/sec
Motor Voltage	24 VDC 10 Amp (Max.)

Environmental

Wind loading	
Operational	72 km/h (45 mph)
Survival	
Deployed	112 km/h (70 mph)
Stowed	225 km/h (140 mph)
Temperature	
Operational	-30° to 55° C (-22° to 131° F)
Survival	-40° to 65° C (-40° to 149° F)
Solar Radiation	1000Kcal/h/m (360 BTU/h/sq. ft.)
Rain	10 cm/h (4 in/h)
Humidity	0-100% (condensing)
Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures	
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked	
Shock Test per IEC 60068-2-27	

Electrical

Rx & Tx Cables	2 RG6 Cables - 10 m (33 ft) each
Control Cables	
Standard	10 m (33 ft) Extension Cable
Optional	Up to 30 m (100 ft) available

RF Interface

Radio Mounting	Feed arm/Inside vehicle
Coaxial	RG6U F Type
	N Type (optional)
Axis transition	Rotary Joint + Twist-Flex Waveguide

Physical

Stowed dimensions	L: 214 cm (84.25")	W: 154 cm (60.5")
	H: 40 cm (15.75")	
Reflector Weight	11.3 kg (25 lbs)	
Platform Weight	72.7 kg (160 lbs)	
Total Platform Weight	84 kg (185 lbs)	

Shipping Weights & Dimensions*

Platform Crated: 211 cm x 41 cm x 61 cm (83" x 16" x 24"), 118 kg (260 lbs)
Reflector Crate: 168cm x 168cm x 48cm (66" x 66" x 19"), 116.3 kg (256 lbs)
Total Weight: 234.3 kg (516 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Antenna Bands

Transmit Power ⁽¹⁾	1 to 400 watt			• 1 to 125 watt	
Feed	2 Port XPol				
	<i>Ku-Linear</i>	<i>C-Linear (Std/INSAT) ⁽³⁾</i>	<i>X Band ⁽³⁾</i>	<i>Ka - Linear R/O ⁽³⁾</i>	
	Receive Transmit	Receive Transmit	Receive Transmit	Receive	
Frequency (GHz)	10.70 - 12.75 ⁽²⁾ 13.75 - 14.50	3.40 - 4.20 ⁽²⁾ 5.850 - 6.725	7.25-7.75 7.90-8.40	17.70 - 21.2 ⁽²⁾	
Optional	10.70 - 11.70 12.75 - 14.50	4.50 - 4.80 6.725 - 7.025			
Feed Interface	WR75 WR75	CPR-229 N or CPR-137		WR42	
Midband Gain Co-Pol (± 0.2dBi)	43.70 45.00	33.40 37.20			
Antenna Noise Temp. (K)	10° EL = 65 / 20° EL = 58	10° EL = 45 / 20° EL = 40			
Sidelobe Envelope, Co-Pol (dBi)					
1.5° < Θ < 20°	Meets ITU 580, INTELSAT	IESS 601 STD G	DSCS Req.		
20° < Θ < 26.3°	-3.5	-3.5			
26.3° < Θ < 48°	32-25 Log Θ	32-25 Log Θ			
48° < Θ < 180°	-10 (Typical)	-10 (Typical)			
Cross-Polarization on Axis	> 35 dB	> 30 dB			
Within 1dB Beamwidth	> 30 dB	> 26 dB			
Tx/Rx Isolation	> 40 dB 90 dB	> 60 dB 35 dB			
VSWR	1.3:1 1.3:1	1.5:1 1.3:1	1.25:1 (Max.)		

Notes: ⁽¹⁾ Depending on size and weight for feed arm mounting limitation

⁽²⁾ LNB PLL Type required with stability better than ± 25 KHz

⁽³⁾ Call your C-COM sales representative for availability

⁽⁴⁾ Offered on platforms only



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)

www.c-comsat.com

Specifications are subject to change

June 2022

25

1801

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® 1801 Drive-Away Antenna is a 1.8m auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere.



Features

- One-Piece precision offset, thermoset-molded reflector with back cover
- Optional 2pcs and 4pcs reflector available
- Heavy duty feed arm capable of supporting up to 11kg (25 lbs) RF Electronics (LNB & BUC)
- Designed to work with the iNetVu® 7710 controller
- Works seamlessly with the world's most popular commercially available satellite modems
- 3 Axis motorization
- Supports manual control and hand crank when required
- One button, auto-pointing controller acquires any Ku or C band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Supports Global Invacom 1.8m antenna Type 183
- Standard 2 year warranty

Application Versatility

Whether you operate in Ku or C band, the 1801 system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

26

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	1.8m prime focus, offset feed, SMC ⁽¹⁾
Platform Geometry	Elevation over Azimuth
Deployment Sensors GPS Antenna	Compass $\pm 2^\circ$, Tilt Sensor $\pm 0.2^\circ$
F/D Ratio	0.61
Azimuth	Full 360° in overlapping, 200° sectors
Elevation	0° to 90°
Polarization	$\pm 95^\circ$
Elevation Deploy Speed	Variable 2°/sec typ.
Azimuth Deploy Speed	Variable 15°/sec typ., 10°/sec typ.
Peaking Speed	0.1°/sec
Motor Voltage	24VDC 15 Amp (Max.)

Environmental

Wind loading	
Operational	80 km/h (50 mph)
Survival	
Deployed	112 km/h (70 mph)
Stowed	225 km/h (140 mph)
Temperature	
Operational	-30° to 55° C (-22° to 131° F)
Survival	-40° to 65° C (-40° to 149° F)
Thermal Test per MIL-STD-810F, Method 501.4, High/Low Temperatures	
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked	
Shock Test per IEC 60068-2-27	

Electrical

Rx & Tx Cables	2 RG6 Cables
Control Cables	
Standard	10 m (33 ft) Extension Cable
Optional	Up to 45 m (150 ft) available

RF Interface

Radio Mounting	Feed arm/ Inside vehicle
Coaxial	RG6U from feedhorn to base plate
Axis Transition	Twist-Flex Waveguide
Electrical Interface	9.1m (30 ft) ext. cables w/MIL connectors
VSWR	Tx 1.3:1

Physical

Mounting Plate	L: 169.8 cm (66.9") W: 55 cm (21.7")
Stowed Dimensions	L: 265 cm (104.3") W: 180.1 cm (70.9")
	H: 50 cm (19.7")
Deployed Height	255 cm (100.4")
Reflector weight	39.2 kg (86.5 lbs)
Platform weight	145.8 kg (321.5 lbs)

Notes: ⁽¹⁾ Antenna based on Skyware Global, Type 183⁽²⁾ Depending on size and weight for feed arm mounting limitation⁽³⁾ LNB PLL Type required with stability better than ± 25 KHz⁽⁴⁾ Feed can support up to 14.80 GHz**Ku-Band (Linear Orthogonal)**

	Receive	Transmit
Transmit Power	1 to 200 watt ⁽²⁾	
Frequency (GHz)	10.70-12.75 ⁽³⁾	13.75-14.50 ⁽⁴⁾
(Optional)	10.70-11.70	12.75-14.50
Feed Interface	WR75	WR75
Efficiency	70%	70%
Midband Gain (± 0.2 dB)	45.30	46.80
Antenna Noise Temp. (K)	10° EL= 43 / 20° EL= 28 / 30° EL=23	
Sidelobe Envelope,	1°< θ <20°	29-25 Log θ
Co-Pol (dBi)	20°< θ <26.3°	-3.5
	26.3°< θ <48°	32-25 Log θ
	48°< θ <180°	-10 (Average)
Cross-Polarization on Axis	-30 dB	
Within 0.5 dB Beamwidth	-26 dB	
Isolation (Port to Port)	35 dB	80 dB

C-Band (Linear)

	Receive	Transmit
Standard Frequency (GHz)	3.40-4.20 ⁽³⁾	5.850-6.725
INSAT Frequency (GHz)	4.5-4.8	6.725-7.025
Feed Interface	WR229	WR137 or Type N
Midband Gain (± 0.3 dB)	35.40	39.30
Antenna Noise Temp. (K)	10° EL= 41 / 20° EL= 36 / 30° EL=33	
Sidelobe Envelope,	2.5°< θ <20°	29-25 Log θ
Co-Pol (dBi)	20°< θ <26.3°	-3.5
	26.3°< θ <48°	32-25 Log θ
	48°< θ <180°	10 (Average)
Cross-Pol: on Axis	-30 dB	
Within 0.5 dB Beamwidth	-26 dB	
Tx/Rx Isolation	60 dB	60 dB

C-Band (Circular)

	Receive	Transmit
Standard Frequency (GHz)	3.625-4.20 ⁽³⁾	5.85-6.425
Feed Interface	WR229	WR137 or Type N
Midband Gain (± 0.4 dB)	35.40	39.50
Antenna Noise Temp. (K)	10° EL= 41 / 20° EL= 36 / 30° EL= 33	
Sidelobe Envelope,	2.8°< θ <20°	29-25 Log θ
Co-Pol (dBi)	20°< θ <26.3°	-3.5
	26.3°< θ <48°	32-25 Log θ
	48°< θ <180°	-10 (Average)
Isolation	60 dB	60 dB

Shipping Weights & Dimensions*

Empty Crate w/ Lid: 228 cm x 108 cm x 75 cm (90" x 42.5" x 29.5"); 99.6 kg (219.5 lbs)
 Crate w/ Ku Platform: 245.4 kg (541 lbs); 7710 Controller: 4.5 kg (9.9 lbs.); Cables: 5 kg (11 lbs)
 Reflector Box (Reflector, Back Cover included) on Pallet, wood: 208 cm x 206 cm x 38 cm (82" x 81" x 15"), 102 kg (225 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements





Classic DRIVEAWAYS



Classic Drive-Aways

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

1200

1500



C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

1200

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® 1200 Drive-Away Antenna is a 1.2m auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7000C Controller providing fast satellite acquisition within minutes, anytime anywhere.



Features

- One-Piece offset feed, prime focus, SMC reflector with a back cover
- Heavy duty platform for up to 11kg (25 lbs) RF Electronics (LNB & BUC)
- Designed to work with the iNetVu® 7000C controller
- Works seamlessly with the world's most popular commercially available satellite modems
- 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires any Ku-band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Supports Prodelin 1.2m antenna, Model 1132/1134
- Standard 2 year warranty

Application Versatility

If you operate in Ku-band, the 1200 system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

1200

iNetVu®
by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	1.2m Prime Focus, Offset Feed, SMC ⁽¹⁾
Platform Geometry	Elevation Over Azimuth
Deployment Sensors	GPS antenna
	Compass $\pm 2^\circ$
	Tilt sensor $\pm 0.1^\circ$
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 78° ⁽²⁾
Polarization	$\pm 90^\circ$
Elevation Deploy Speed	Variable 2°/sec typ.
Azimuth Deploy Speed	Variable 15°/sec Max., 10°/sec typ.
Peaking Speed	0.2°/sec

Electrical

Rx & Tx cable	2 RG6 cables - 9.1m (30 ft) each	
Control cables		
Standard:	9.1 m (30 ft) Ext. Cable with MIL Connectors	
Optional:	up to 60 m (200 ft) available	
	Ku-band (Linear)	X-band (Circular)
Transmit Power ⁽³⁾	1 to 200 Watt	1 to 40 Watt
Receive Frequency (GHz)	10.70 - 12.75 ⁽⁴⁾	7.25 - 7.75
(Optional)	10.70 - 11.70	
Transmit Frequency (GHz)	13.75 - 14.80	7.90 - 8.40
(Optional)	12.75 - 14.50	
Midband Gain (± 0.2 dB)		
(Rx)	41.50	37.40
(Tx)	43.00	38.10
Antenna Noise Temp. (K)	20° EL=46 / 30° EL=43	20° EL=51.6
Sidelobe Envelope, Co-Pol (dBi)		
1° < θ < 20°	29 - 25 Log θ	DSCS Req.
20° < θ < 26.3°	-3.5	
26.3° < θ < 48°	32 - 25 Log θ	
48° < θ < 180°	-10 (averaged)	
Cross-Polarization		
Within 1 dB contour	-30 dB (Max.)	
Any angle off axis	-25 dB (Max.)	
VSWR	1.3:1 (Max.)	1.25:1 (Max.)

Environmental

Survival		
Wind Deployed	112 km/h	(70 mph)
Wind Stowed	225 km/h	(140 mph)
Temperature	-40°C to 65°C	(-40°F to 150°F)
Operational		
Wind	72 km/h	(45 mph)
Temperature	-32°C to 55°C	(-26°F to 130°F)

Thermal Test per MIL-STD-810F, Method 501.4, Low Temperatures

Physical

Mounting Plate	L: 132 cm (52")	W: 56 cm (22")
Stowed Reflector Ext. Dims	L: 177 cm (69.75")	W: 123 cm (48.6")
	H: 49 cm (19.25") ⁽⁵⁾	
Deployed Height	168 cm (66")	
Reflector Weight	15.9 kg (35 lbs)	
Total Weight w/Reflector	92.5 kg (204 lbs)	

RF Interface

Radio Mounting	Feed Arm / Rear of Base / Inside Vehicle
Axis Transition	Twist-Flex Waveguide
Waveguide	WR75 Cover Flange Interface
Coaxial	RG6U from Feed Arm to Base
Feed	2 port Xpol

Motors

Electrical Interface	12VDC	15 Amp (Max.)
----------------------	-------	---------------

Shipping Weights & Dimensions*

Platform Crate: 168 cm x 89 cm x 77 cm (66" x 35" x 30"), 59.5 kg (131 lbs)
Platform: 76.5 kg (168 lbs) 7000C Controller: 6 kg (13 lbs) Cables: 5 kg (11 lbs)
Reflector Crate: 145 cm x 15 cm x 130 cm (57" x 6" x 51"), 22 kg (48 lbs)
Total Weight: 169 kg (371 lbs)

1-Piece Transportable Case: (Optional)
219 cm x 143 cm x 84 cm (86" x 56" x 33"), Appr. 164 kg (362 lbs)

2-Piece Plastic Transportable Cases: (Optional)
Platform: 178 cm x 69 cm x 74 cm (70" x 27" x 29"), 149 kg (328 lbs)
Reflector: 132cm x 25cm x 147cm (52" x 10" x 58"), 49 kg (109 lbs)
Total Weight: 198 kg (437 lbs)

2-Piece Metallic Transportable Cases: (Optional)
Platform: 178 cm x 76 cm x 74 cm (70" x 30" x 29"), 161.5 kg (356 lbs)
Reflector: 132cm x 25cm x 147cm (52" x 10" x 58"), 50 kg (110 lbs)
Total Weight: 211.5 kg (466 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

- ⁽¹⁾ Antenna based on Prodelin, Model 1132 / 1134
- ⁽²⁾ Adjustable at the time of order to support higher elevation angle (Optional)
- ⁽³⁾ Depending on size and weight for feed arm mounting limitation
- ⁽⁴⁾ LNB PLL Type required with stability better than ± 25 KHz
- ⁽⁵⁾ Lower stow height option available (approx 4 cm lower)

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

31

1500

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® 1500 Drive-Away Antenna is a 1.5m auto-acquire satellite antenna system which can be mounted on the roof of a vehicle for Broadband Internet Access over any configured satellite. The system works seamlessly with the iNetVu® 7000C Controller providing fast satellite acquisition within minutes, anytime anywhere.



Features

- One-Piece precision mold, offset feed, carbon fibre reflector
- Heavy duty platform for up to 11kg (25 lbs) RF Electronics (LNB & BUC)
- Designed to work with the iNetVu® 7000C Controller
- Works seamlessly with the world's most popular commercially available satellite modems
- 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing Controller acquires any Ku or C band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Standard 2 year warranty

Application Versatility

If you operate in Ku or C band, the 1500 system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

1500

iNetVu®
by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	1.5m Carbon Fibre
Platform Geometry	Parabolic Single Offset, 0.78 F/D (16.9° offset)
Deployment Sensors	GPS antenna Compass ± 2° Tilt sensor ± 0.2°
Azimuth	Full 360° in overlapping 200° sectors
Elevation	0 - 75°
Polarization	±90°
Elevation Deploy Speed	Variable 2°/sec typ.
Azimuth Deploy Speed	Variable 15°/sec Max., 10°/sec typ.
Peaking Speed	0.2°/sec

Environmental

Survival	
Wind Deployed	112 km/h (70 mph)
Wind Stowed	225 km/h (140 mph)
Temperature	-40°C to 65°C (-40°F to 150°F)
Rain	15 cm/h (6 in/h)
Operational	
Rain	10 cm/h (4 in/h)
Wind	72 km/h (45 mph)
Temperature	-30°C to 55°C (-22°F to 130°F)
Relative Humidity	0 - 100%
Solar Radiation	360 btu/h/ft2 (1000 Kcal/h/m)
Radial Ice (survival)	2.54 cm (1")
Corrosive Atmosphere	As encountered in coastal / industrial areas

Electrical

Tx & Rx cables	2 RG6 cables - 9.1m (30 ft) each
Control Cables	
Standard	9.1m (30 ft) Ext. Cable with MIL Connectors
Optional	up to 60 m (200 ft) available

RF Interface

Radio Mounting	Feed Arm / Rear of Base / Inside Vehicle
Axis Transition	Twist-Flex Waveguide
Waveguide	WR75 Cover Flange Interface
Coaxial	RG6U from Feed Arm to Base
Feed	2 port Xpol
VSWR	1.3:1 (Max.)

Physical

Mounting Plate	L: 132 cm (52") W: 56 cm (22")
Stowed Reflector Ext. Dims	L: 189 cm (74.5") W: 154 cm (60.5") H: 49 cm (19.25")
Deployed Height	180 cm (71")
Reflector Weight	11.3 kg (25 lbs)
Total Weight w/Reflector	87 kg (192 lbs)

Note: ⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz

Motors

Electrical Interface	12VDC	15 Amp (Max.)
----------------------	-------	---------------

2 Port Cross Pol (Ku-Band)

	Receive	Transmit
Standard Frequency (GHz)	10.70-12.75 ⁽¹⁾	13.75-14.50
Midband Gain (± .2 dBi)	43.70	45.00
Cross Pol: On Axis	-35 dB	
in 1 dB BW	-28 dB	
Sidelobe Compliances	Meets ITU 580, INTELSAT	
Isolation: Tx / Rx	-85 dB	0 dBm input
Rx / Tx	0 dB input	-35 dB
Antenna Noise Temp. (°K)	10° EL= 65 / 20° EL= 58	
VSWR	1.50:1	1.30:1

2 Port C-Band (Linear)

	Receive	Transmit
Standard Frequency (GHz)	3.40-4.20 ⁽¹⁾	5.850-6.725
INSAT Frequency (GHz)	4.50-4.80	6.725-7.025
Midband Gain (± .2 dBi)	33.40	37.20
Cross Pol: On Axis (Std)	-30 dB	
On Axis (INSAT)	-35 dB	
in 1 dB BW	-26 dB	-26 dB
Sidelobe Compliances	IESS 601 Std G	
Isolation: Tx / Rx (Std)	-60dB	0 dBm input
Tx / Rx (INSAT)	-70 dB	
Rx / Tx	0 dBm input	-35 dB
Antenna Noise Temp. (K)	10° EL= 45 / 20° EL= 40	
VSWR	1.50:1	1.30:1

2 Port C-Band (Circular)

	Receive	Transmit
Standard Frequency (GHz)	3.625-4.20 ⁽¹⁾	5.85-6.425
Midband Gain (± .2 dBi)	33.30	37.10
Sidelobe Envelope, Co-Pol (dBi)		
2.8° < Ø < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10	
Feed Interface	CPR-229n	Type N or CPR- 137
Isolation (Port to Port)	-60dB	-60dB
Antenna Noise Temp.(K)	10° EL= 41 / 20° EL= 36	
VSWR	1.50:1	1.30:1

Shipping Weights & Dimensions*

Crate: 213cm x 89cm x 84cm (84" x 35" x 33"), 64.5 kg (142 lbs)
Platform: 75.9 kg (167 lbs); 7024C Controller: 6 kg (13 lbs); Cables: 5 kg (11 lbs)
Reflector Crate: 168cm x 168cm x 48cm (66" x 66" x 19"), 115 kg (256 lbs)
Total, Platform Crate and Reflector Crate, 2 - Pieces: 267kg (589 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

33



Fly-Away ANTENNAS



TECHNICAL SPECIFICATIONS

FLY-74G



FLY-74H



FLY-75V



FLY-981



FLY-98G



FLY-98V



FLY-98H



ACFLY-1200



FLY-1202



FLY-1202V



FLY-1202G



FLY-1801



FLY-74G



TECHNICAL SPECIFICATIONS

The iNetVu® FLY-74G Flyaway Antenna is a 74 cm highly portable Ka-band, self-pointing, auto-acquire system that is configurable with the iNetVu® 7710 Controller, providing fast satellite acquisition within minutes, anytime anywhere. The antenna works seamlessly with the world's emerging commercial satellites and can be assembled in 10 minutes by one person.



Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm supports 3W transceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial GEO Satellites
- 2 Axis or 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires any GEO Ka-band satellite within 2 minutes
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 2 ruggedized cases
- Supports Global Invacom 74 cm Ka antenna
- Standard 2 year warranty

Application Versatility

If you operate in Ka-band over GEO satellite services, the FLY-74G system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup and many others.



TECHNICAL SPECIFICATIONS

Mechanical

Reflector	74cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 180^\circ$
Elevation	0 - 90°
Polarization	Circular, RH or LH (Manual or Auto)
Elevation Deploy Speed	Variable, $3^\circ/\text{sec}$ typ.
Azimuth Deploy Speed	Variable $3^\circ/\text{sec}$ typ.
Peaking Speed	$0.1^\circ/\text{sec}$

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)

Thermal Test per MIL-STD-810F, Method 501.4/502.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Appendix A, Water Ingress Rating: IP-66

Electrical

Rx & Tx Cable	Dual IFL, RG6 cable - 10 m (33 ft)	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)		
3W-XRF	17.80 - 20.20	29.00 - 30.00
Konnet 3W-XRF	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8025	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8023	17.70 - 20.20	28.10 - 29.10
Feed Interface (Circular)	RG6	RG6
Midband Gain (+/-0.5 dBi)	41.6 @19.2 GHz	45.3 @29.0 GHz
Antenna Noise Temp. (K)	30° EL= 50 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < θ < 20°	29 - 25 Log θ	
20° < θ < 26.3°	-3.5	
26.3° < θ < 48°	32-25 Log θ	
48° < θ < 180°	-10 (typical)	
Cross-Polarization	> 23 dB	> 25 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from transceiver to tripod base

Physical

Case 1: Tripod/Reflector (Includes transceiver & upgraded tripod feet)		
	L: 92.7cm (36.6")	W: 33.1 cm (13.03")
	H: 89.5cm (35.25")	32 Kg
Case 2: Controller/AZ/EL (Includes external power cable, coax cables, & 7710 controller)		
	L: 102.9 cm (40.5")	W: 47.6cm(18.75")
	H: 50.8 cm (20")	28.8 Kg

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Case 1: 86.4cm x 86.4cm x 31.8 cm (34" X 34" X 12.5"); 32 kg

Case 2: 45.7 cm x 99.1 cm x 47 cm (18" x 39" x 18.5"); 32 kg

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

FLY-74H



TECHNICAL SPECIFICATIONS

The iNetVu® FLY-74H Flyaway Antenna is a 74 cm highly portable Ka-band, self-pointing, auto-acquire system that is configurable with the iNetVu® 7710 Controller, providing fast satellite acquisition within minutes, anytime anywhere. The antenna works seamlessly with the world's emerging commercial satellites and can be assembled in 10 minutes by one person.

Compliant for use on HNS Jupiter Satellite Services

Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm supports Jupiter Radios
- Designed to work with the iNetVu® 7710 Controller
- Works with HNS Jupiter services
- 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires any GEO Ka-band satellite within 2 minutes
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 2 ruggedized cases
- Supports Global Invacom 74 cm Ka antenna
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band over GEO satellite services, the FLY-74H system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup and many others.



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

FLY-74H

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	74cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 175^\circ$
Elevation	0 - 90°
Polarization	Circular, RH or LH (Auto)
Elevation Deploy Speed	Variable, 3°/sec typ.
Azimuth Deploy Speed	Variable 3°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)

Thermal Test per MIL-STD-810F, Method 501.4/502.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Appendix A, Water Ingress Rating: IP-66

Electrical

Rx & Tx Cable	Single IFL, RG6 cable - 10 m (33 ft)	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	17.70 - 20.20	28.0-30.0
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.5 dBi)	41.6 @19.2 GHz	45.3 @29.0 GHz
Antenna Noise Temp. (K)	30° EL= 50 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < Ø < 20°	29 - 25 Log Ø	
20° < Ø < 26.3°	-3.5	
26.3° < Ø < 48°	32-25 Log Ø	
48° < Ø < 180°	-10 (typical)	
Cross-Polarization	> 23 dB	> 25 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from transceiver to tripod base

Physical

Case 1: Tripod/Reflector (Includes transceiver & upgraded tripod feet)		
	L: 92.7cm (36.6")	W: 33.1 cm (13.03")
	H: 89.5cm (35.25")	32 Kg
Case 2: Controller/AZ/EL (Includes external power cable, coax cable, & 7710 controller)		
	L: 102.9 cm (40.5")	W: 47.6cm(18.75")
	H: 50.8 cm (20")	28.8 Kg

Motors


Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Case 1: 86.4cm x 86.4cm x 31.8 cm (34" X 34" X 12.5"); 32 kg

Case 2: 45.7 cm x 99.1 cm x 47 cm (18" x 39" x 18.5"); 32 kg

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



FLY-75V

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® FLY-75V Flyaway Antenna is a 75 cm satellite antenna system which is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere. It can be assembled in 10 minutes by one person.

"Authorized for use on ViaSat Exede® Enterprise and on KA-SAT NEWSPOTTER NEWSGATHERING service by Eutelsat* "



Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm now supports both type of Transceivers: Standard Tria and new eTRIA
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial ViaSat/KA-SAT satellite Surfbeam II/PRO Auto-acquire modems
- Auto beam select on KA-SAT Tooway services
- 2 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 2 ruggedized cases
- Supports Viasat/Skyware 75 cm Ka antenna
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band, the FLY-75V system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

* http://www.eutelsat.com/files/contributed/support/pdf/Eutelsat_Broadband_Services.pdf (p.14)



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

FLY-75V



TECHNICAL SPECIFICATIONS

Mechanical

Reflector	75cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 175^\circ$
Elevation	0 - 90°
Polarization	Circular, Auto-switching
Elevation Deploy Speed	Variable, 3°/sec typ.
Azimuth Deploy Speed	Variable 3°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)

Thermal Test per MIL-STD-810F, Method 501.4/502.4, High/Low Temperatures
Vibration Test per MIL-STD-810F, Annex A, Category 4, Truck/Trailer/Tracked
Shock Test per IEC 60068-2-27, Appendix A, Water Ingress Rating: IP-66

Electrical

Rx & Tx Cable	Single IFL, RG6 cable - 10 m (33 ft)	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	18.30 - 20.20	28.10 - 30.00
Feed Interface (Circular)	RG6	RG6
Nominal G/T	17.5 dB/K	
Nominal EIRP	48.4 dBW	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U from transceiver to tripod base

Physical

Case 1: Tripod/Reflector	L: 85 cm (33.5") H: 29 cm (11.5")	W: 85 cm (33.5") 32 Kg
Case 2: Controller/AZ/EL	L: 44.5 cm (17.5") H: 38 cm (15.5")	W: 80 cm (31.5") 32 Kg

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Case 1: 85 cm x 85 cm x 29 cm (33.5" x 33.5" x 11.5"); 32 kg

Case 2: 44.5 cm x 80 cm x 38 cm (17.5" x 31.5" x 15.5"); 32 kg

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



FLY-981



TECHNICAL SPECIFICATIONS

The iNetVu® FLY-981 Flyaway Antenna is a 98 cm satellite antenna system which is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere. It can be assembled in 10 minutes by one person.



Field Upgradable to FLY-98G, FLY-98V or FLY-98H

Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm capable of supporting up to 5kg (10lbs) RF Electronics (LNB & BUC)
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's most popular commercially available Ku modems
- 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ku-band satellite within 2 minutes
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 3 ruggedized cases
- Standard 2 year warranty

Application Versatility

If you operate in Ku-band, the FLY-981 system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ku terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



FLY-981

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 175^\circ$
Elevation	0 - 90°
Polarization	$\pm 90^\circ$
Elevation Deploy Speed	Variable, 3°/sec typ.
Azimuth Deploy Speed	Variable 3°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Water Ingress Rating	IP-66

Electrical

Rx & Tx Cables	2 RG6 cables -10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	10.70-12.75 ⁽¹⁾	13.75-14.50
Optional	10.70-11.70	12.75-14.50
Feed Interface	WR-75	WR-75
Midband Gain (± 0.2 dBi)	39.70@12.00 GHz	41.20@14.30 GHz
Antenna Noise Temp. (K)	10° EL=53 / 20° EL= 39 / 30° EL= 32 Max.	
Sidelobe Envelope Co-Pol (dBi)		
1.8° < θ < 20°	29 - 25 Log θ	
20° < θ < 26.3°	-3.5	
26.3° < θ < 48°	32-25 Log θ	
48° < θ < 180°	-10 (typical)	
Cross-Polarization	> -30 dB in 1 dB Contour	
VSWR	1.5:1	1.3:1

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U F Type to tripod base (N Type Optional)

Physical

Case 1: Reflector	L: 109 cm (43") H: 29 cm (11.5")	W: 109 cm (43") 28.6 Kg (63 lbs)
Case 2: Tripod/Feed arm	L: 122 cm (48") H: 28cm (11")	W: 58 cm (23") 27.7 Kg (61 lbs)
Case 3: Controller/AZ/EL	L: 44.5 cm (17.5") H: 38 cm (15.5")	W: 80 cm (31.5") 34 Kg (75 lbs)

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Skid: 132 cm x 137 cm x 121.9 cm (52" x 54" x 48") 23.1 Kg (51lbs)
 Total weight of system in cases: 90.3 Kg (199 lbs)
 Total weight of system in cases on skid: 113.4 Kg (250 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Note: ⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

FLY-98G

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® FLY-98G Flyaway Antenna is a 98 cm satellite antenna system which is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere. It can be assembled in 10 minutes by one person.

Thor7 Type Approved and Compliant for use on Avanti Hylas Ka Satellite Services

Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm capable of supporting up to 5kg (10lbs) Ka transceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial Ka modems and services
- 2 Axis motorization (Optional - motorized 3rd axis)
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Field upgradable to Ku-band
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 3 ruggedized cases
- Supports Global Invacom 98 cm Ka antenna
- Avanti Approved; Thor7 Type Approved; also compliant with Gilat/iDirect/Newtec Ka services
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band, the FLY-98G system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

FLY-98G

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna
	Compass $\pm 2^\circ$
	Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 175^\circ$
Elevation	0 - 90°
Polarization	($\pm 45^\circ$), Circular Auto
Elevation Deploy Speed	Variable, $3^\circ/\text{sec}$ typ.
Azimuth Deploy Speed	Variable $3^\circ/\text{sec}$ typ.
Peaking Speed	$0.1^\circ/\text{sec}$

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Water Ingress Rating	IP-66

Electrical

Rx & Tx Cables	2 RG6 cables -10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)		
3W-XRC	19.20 - 20.20	29.50 - 30.00
(Optional) 3W-XRF	17.80 - 20.20	29.00 - 30.00
(Optional) 4W - AN8025	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8023	17.70 - 20.20	28.10 - 29.10
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.2 dBi)	43.80 @19.70 GHz	47.20 @29.75 GHz
Antenna Noise Temp. (K)	30° EL= 62 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < \emptyset < 20°	29 - 25 Log \emptyset	
20° < \emptyset < 26.3°	-3.5	
26.3° < \emptyset < 48°	32-25 Log \emptyset	
48° < \emptyset < 180°	-10 (typical)	
Cross-Polarization	> -24 dB	> -22 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U F Type to tripod base

Physical

Case 1: Reflector	L: 109 cm (43") H: 29 cm (11.5")	W: 109 cm (43") 28.6 Kg (63 lbs)
Case 2: Tripod/Feed arm	L: 122 cm (48") H: 28cm (11")	W: 58 cm (23") 27.7 Kg (61 lbs)
Case 3: Controller/AZ/EL	L: 44.5 cm (17.5") H: 38 cm (15.5")	W: 80 cm (31.5") 34 Kg (75 lbs)

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Skid: 132 cm x 137 cm x 121.9 cm (52"x 54"x48") 23.1 Kg (51lbs)
 Total weight of system in cases: 90.3 Kg (199 lbs)
 Total weight of system in cases on skid: 113.4 Kg (250 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

FLY-98V



TECHNICAL SPECIFICATIONS

The iNetVu® FLY-98V Flyaway Antenna is a 98 cm satellite antenna system which is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere. It can be assembled in 10 minutes by one person.

"Compliant for use on ExedeSM Ka Service by ViaSat and on KA-SAT NEWSSPOTTER NEWSGATHERING service by Eutelsat"



Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm capable of supporting up to 5kg (10lbs) Ka transceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial ViaSat /KA-SAT satellite Surfbeam II/PRO Auto-acquire modems
- Auto beam select on KA-SAT Tooway services
- 2 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Field upgradable to Ku-band
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 3 ruggedized cases
- Supports Global Invacom 98 cm Ka antenna
- Standard 2 year warranty

Application Versatility

If you operate in Ka-band, the FLY-98V system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.



FLY-98V

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 175^\circ$
Elevation	0 - 90°
Polarization	Circular, Auto-switching
Elevation Deploy Speed	Variable, 3°/sec typ.
Azimuth Deploy Speed	Variable 3°/sec typ.
Peaking Speed	0.1°/sec

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Water Ingress Rating	IP-66

Electrical

Rx & Tx Cable	Single IFL, RG6 cable - 10 m (33 ft)	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	18.30 - 20.20	28.10 - 30.00
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.2 dBi)	43.50 @19.75 GHz	46.60 @29.75 GHz
Antenna Noise Temp. (K)	30° EL= 62 Max.	
Sidelobe Envelope Co-Pol (dBi)		
100λ / D < 0° < 20°	29 - 25 Log Ø	
20° < 0° < 26.3°	-3.5	
26.3° < 0° < 48°	32-25 Log Ø	
48° < 0° < 180°	-10 (typical)	
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm
Coaxial	RG6U F Type to tripod base

Physical

Case 1: Reflector	L: 109 cm (43") H: 29 cm (11.5")	W: 109 cm (43") 28.6 Kg (63 lbs)
Case 2: Tripod/Feed arm	L: 122 cm (48") H: 28cm (11")	W: 58 cm (23") 27.7 Kg (61 lbs)
Case 3: Controller/AZ/EL	L: 44.5 cm (17.5") H: 38 cm (15.5")	W: 80 cm (31.5") 34 Kg (75 lbs)


Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Skid: 132 cm x 137 cm x 121.9 cm (52" x 54" x 48")	23.1 Kg (51lbs)
Total weight of system in cases: 90.3 Kg (199 lbs)	
Total weight of system in cases on skid: 113.4 Kg (250 lbs)	

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



FLY-98H

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® FLY-98H Flyaway Antenna is a 98 cm satellite antenna system which is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller providing fast satellite acquisition within minutes, anytime anywhere. It can be assembled in 10 minutes by one person.

Compliant for use on HNS Jupiter, Avanti & Yahsat Satellite Services

Features

- One-Piece, high surface accuracy, offset feed, steel reflector
- Heavy duty feed arm capable of supporting up to 5kg (10lbs) Ka transceiver
- Designed to work with the iNetVu® 7710 Controller
- Works seamlessly with the world's emerging commercial Ka modems and services
- 2 or 3 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellite within 2 minutes
- Captive hardware / Fasteners
- 10 minute assembly by one person, no tools required
- Compact packaging; 3 ruggedized cases
- Supports Global Invacom 98 cm Ka antenna
- Works with HNS Jupiter (NA) (1), Yahsat (MENA) (1) and Avanti (1)
- Standard 2 year warranty



Application Versatility

If you operate in Ka-band, the FLY-98H system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. This next generation Flyaway Ka terminal delivers affordable broadband Internet services (High-speed access, Video & Voice over IP, file transfer, e-mail or web browsing). Ideally suited for industries such as Oil & Gas Exploration, Military Communications, Disaster Management, SNG, Emergency Communications Backup, Cellular Backhaul and many others.

⁽¹⁾ Uses JUPITER Radio

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

48

FLY-98H

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	98 cm Elliptical Antenna, offset feed
Platform Geometry	Elevation over Azimuth
Deployment Sensors	GPS antenna Compass $\pm 2^\circ$ Tilt sensor $\pm 0.1^\circ$
Azimuth	$\pm 175^\circ$
Elevation	0 - 90°
Polarization	$\pm 45^\circ$, Circular
Elevation Deploy Speed	Variable, $3^\circ/\text{sec typ.}$
Azimuth Deploy Speed	Variable $3^\circ/\text{sec typ.}$
Peaking Speed	$0.1^\circ/\text{sec}$

Environmental

Wind loading	
Operational (no ballast)	50 km/h (30 mph)
Operational (with ballast)	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Water Ingress Rating	IP-66

Electrical

Rx & Tx Cables	2 RG6 cables -10 m (33 ft) each	
Control Cables		
Standard	10 m (33 ft) Ext. Cable	
Optional	up to 60 m (200 ft) available	
	Receive	Transmit
Frequency (GHz)	19.20 - 20.20	29.50 - 30.0
Feed Interface (Circular)	RG6	RG6
Midband Gain (+0.2 dBi)	43.50 @19.75 GHz	46.60 @29.75 GHz
Antenna Noise Temp. (K)	30° EL= 62 Max.	
Sidelobe Envelope Co-Pol (dBi)		
$100\lambda / D < \theta < 20^\circ$	29 - 25 Log θ	
$20^\circ < \theta < 26.3^\circ$	-3.5	
$26.3^\circ < \theta < 48^\circ$	32-25 Log θ	
$48^\circ < \theta < 180^\circ$	-10 (typical)	
Cross-Polarization	> -24 dB	> -22 dB
VSWR	1.3:1	

RF Interface

Radio Mounting	Feed Arm (1)
Coaxial	RG6U F Type to tripod base

Physical

Case 1: Reflector	L: 109 cm (43") H: 29 cm (11.5")	W: 109 cm (43") 28.6 Kg (63 lbs)
Case 2: Tripod/Feed arm	L: 122 cm (48") H: 28cm (11")	W: 58 cm (23") 27.7 Kg (61 lbs)
Case 3: Controller/AZ/EL	L: 44.5 cm (17.5") H: 38 cm (15.5")	W: 80 cm (31.5") 34 Kg (75 lbs)

Motors

Electrical Interface	24VDC	8 Amp (Max.)
----------------------	-------	--------------

Shipping Weights & Dimensions*

Skid: 132 cm x 137 cm x 121.9 cm (52" x 54" x 48") 23.1 Kg (51lbs)
Total weight of system in cases: 90.3 Kg (199 lbs)
Total weight of system in cases on skid: 113.4 Kg (250 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

(1) Support Jupiter radio motorized

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

ACFLY-1200



TECHNICAL SPECIFICATIONS

The iNetVu® Airline Checkable Flyaway antenna system is a highly portable unit with a 6-piece carbon fibre reflector that can fit in a suitcase. It is configurable with the auto-pointing iNetVu® 7024C Controller, cables and another electronic device such as a modem or PowerSmart power supply that can be installed in the second case.



Features

- 1.2m offset, prime focus, 6-piece carbon fibre reflector
- 3 Axis Motorization
- Two Case Solution
- Supports manual control when required
- Airline checkable, meets IATA check-in baggage requirement
- One button, auto-pointing controller acquires any Ku-band satellite within 2 minutes
- Designed to work with the iNetVu® 7024C Controller
- Captive hardware / fasteners
- No tools required for assembly / disassembly
- Set-up time less than 10 minutes, one person job
- Leveling capability for uneven surfaces
- Optimal high-precision antenna pointing
- Includes jog controller functions
- Remote access and operation via network, web and other interfaces
- Patented design
- 1 Year Standard Warranty

Application Versatility

The Airline Checkable Flyaway system is easily configured to provide instant access to satellite communications for any application that requires remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up; vertical markets such as Disaster Management, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services will benefit tremendously from the ACFLY's ease of deployment.



ACFLY-1200

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	1.2m Offset Feed, carbon fibre
Platform Geometry	Elevation over Azimuth
Offset Angle	15°
Antenna Optics	Single Offset
Azimuth	± 180°
Elevation	10° - 90°
Polarization	± 95°
Elevation Deploy Speed	Variable 2° /sec typ.
Azimuth Deploy Speed	Variable 5° /sec typ.
Peaking Speed	0.1 /sec

Environmental

Wind loading	
Operational	
With Ballast / Anchors	50 km/h (31 mph)
Survival	145 km/h (90 mph)
Temperature	
Operational	-30° to 55° C (-22° to 131° F)

Solar Radiation	360 BTU/h/sq. ft.
Rain	1.3cm/h (0.51 in/h)

Vibration per MIL-STD-810F, Annex A, Category 4, Truck/trailer/tracked
Shock Test per IEC 60068-2-27
Bump Test per IEC 60068-2-29
Drop and Topple per IEC 60068-2-31
Free- Fall Drop per IEC 60068-2-32, and ISTA 1A
Dust and Water Ingress per IEC 60529, IP65

Electrical

Rx & Tx Cables	2 RG6 Cables -10m (33 ft) each
Control Cables	
Standard	10m (33 ft) Ext. Cable
Optional	Up to 60m (200 ft) available

RF Interface

Radio Mounting	Back of Reflector
Axis Transition	Rigid + Twist-flex Guide
Waveguide	WR75 Cover Flange Interface
Coaxial	RG6U F Type

Motors

Electrical Interface	24VDC 5 Amp (Max.)
----------------------	--------------------

Cases

Case1: 6-piece antenna platform
48.5 x 71 x 39 cm (19" x 28" x 15.3"), 32 kg (70 lbs)
Case 2: 3U Rack mount including iNetVu® 7024 Controller + feed + cables:
48.5 x 71 x 39 cm (19" x 28" x 15.3"), 32 kg (70 lbs)
Case 3 (Optional): 4U Rack mount
62.2 x 34.3 x 47.6 cm (24.5" x 13.5" x 18.8"), 10.7 kg (23.5 lbs)

Ku-Band (Linear)

Transmit Power	1 to 200 watt	
Feed	2 Port XPol	
	Receive	Transmit
Frequency (GHz)	10.70 - 12.75 ⁽¹⁾	13.75 - 14.50
Optional Ext. Ku Freq (GHz)	10.70 - 11.70 ⁽¹⁾	12.75 - 14.50
Feed Interface	WR75	WR75
Efficiency	70%	70%
Midband Gain (± .2 dBi)	41.50	43.00
Antenna Noise Temp. (K)	10° EL= 45 / 30° EL= 24	
Sidelobe Envelope Co-Pol (dBi)		
1.5°<Θ<20°	29-25 Log Θ	
20°<Θ<26.3°	-3.5	
26.3°<Θ<48°	32-25 Log Θ	
48°<Θ	-10 Typical	
Cross-Polarization on Axis	>35 dB	
Within 1dB Beamwidth	>30 dB	
Return Loss	17.7 dB typ.	20 dB typ.
Insertion Loss	0.3 dB typ.	0.1 dB typ.
Tx/Rx Isolation	40 dB	90 dB
VSWR	1.3:1	1.3:1

Shipping Weights & Dimensions*

Platform Case: 74 cm x 43 cm x 51 cm (29" x 17" x 20"), 34 kg (75 lbs)
Controller Case: 74 cm x 43 cm x 51 cm (29" x 17" x 20"), 34 kg (75 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Note: ⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

51

FLY-1202



TECHNICAL SPECIFICATIONS

The iNetVu® 1.2m Flyaway Antenna System is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller and can be assembled in less than 15 minutes by one person. The antenna features a 2-piece segmented glass fibre reinforced reflector with compact pedestal and is designed to be cost-effective while providing exceptional performance in a light weight package.



Field Upgradable to Ka

Features

- One button auto-pointing controller
- 3 Axis motion (Ku-band), 2 axis (X-band)
- Airline transportable
- Supports manual control when required
- Designed to work with the iNetVu® 7710 Controller
- Captive hardware / fasteners
- 1.2m offset, prime focus, 2-piece thermoset molded reflector
- Supports General Dynamics 1.2m reflector
- No tools required for assembly / disassembly
- Less than 15 minutes assembly time, one person job
- Elevation-over-azimuth pedestal provides excellent stiffness characteristics and convenience for the user
- Eutelsat / Intelsat compliant
- Compact packaging, ruggedized shipping cases
- Minimal maintenance required
- Standard 2 year warranty

Application Versatility

If you operate in Ku-band, the FLY-1202 Flyaway System is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Disaster Management, Military, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.



FLY-1202

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna Size & Material	1.2m Glass fibre reinforced polyester
Platform Geometry	Elevation over azimuth
Antenna optics	2-piece segmented, Offset feed prime focus
Optional	1-piece & 4-piece segmented
Offset angle	16.97°
Azimuth	±175°
Elevation	5° to 90°
Polarization	±95°
Elevation deploy speed	Variable 6° / sec
Peaking speed	0.2° / sec

Environmental

Wind loading	
Operational	
No ballast or anchors	48 km/h (30 mph)
With ballast or anchors	72 km/h (45 mph)
Survival (with ballast)	145 km/h (90 mph)
Solar radiation	360 BTU / h / sq. ft
Temperature	
Operational	-30° to 55° C (-22° to 131° F)
Survival	-40° to 65° C (-40° to 149° F)
Rain	
Operational	10 cm/h
Survival	15 cm/h

RF Interface

Radio mounting	Feed arm
Coaxial	RG6U F type (N type optional)

Electrical

Electrical interface	24VDC 8 Amp (Max.)
Rx & Tx cables	2 RG 6 cables - 10 m (33 ft) each
Control cables	
Standard	10m (33 ft) ext. cable
Optional	up to 60m (200 ft) available

Electrical (Continued)

	Ku-band (Linear)	X-band (Circular)
Transmit Power ⁽¹⁾	1 to 200 Watt	1 to 40 Watt
Receive Frequency (GHz)	10.70 – 12.75 ⁽²⁾	7.25-7.75
Optional	10.70 - 11.70	
Transmit Frequency (GHz)	13.75 – 14.50	7.90-8.40
Optional	12.75 - 14.50	
Optional Ext. Ku Freq (GHz)		
Receive Frequency (GHz)	10.70 - 11.70 ⁽¹⁾	
Transmit Frequency (GHz)	12.75 - 14.50	
Midband Gain(±0.2 dB)		
(Rx)	41.80	37.40
(Tx)	43.30	38.10
Antenna Noise Temp. (K)	10° EL=45	10° EL=50
	30° EL=24	30° EL=42
Sidelobe Envelope, Co-Pol (dBi)		
1.5° < Ø < 20°	29 - 25 Log Ø	DSCS Req.
20° < Ø < 26.3°	- 3.5	
26.3° < Ø < 48°	32 - 25 Log Ø	
48° < Ø < 180°	- 10 (averaged)	
Cross-Polarization on Axis	>35 dB	
Within 1 dB beamwidth	>30 dB	
Tx/Rx isolation	Rx: 40 dB Tx: 90 dB	Rx: 100 dB Tx: 100 dB
Feed	2 port Xpol	2 port Xpol
VSWR		

Cases

Reflector case: 134.6 x 38.1 x 91.5 cm (53" x 15" x 36"); 46.6kg (103lbs)
 AZ/EL case: 53.4 x 59.7 x 40.6 cm (21" x 23.5" x 16"); 37.9kg (83.5 lbs)
 Tripod/feed case: 170.2 x 50.8 x 31.8 cm (67" x 20" x 12.5"); 38.3kg (84.5 lbs)
 4-10U Rack Mount case (Optional): 74 x 51 x 72 cm (29" x 20" x 28"); 32 kg (70 lbs)

Shipping Weights & Dimensions*

TBD

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

⁽¹⁾ Depending on size and weight for feed arm mounting limitation

⁽²⁾ LNB PLL Type required with stability better than ± 25 KHz

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

53

FLY-1202V



TECHNICAL SPECIFICATIONS

The new iNetVu® 1.2m Flyaway Ka-band Antenna System is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller and can be assembled in less than 15 minutes by one person. The antenna features a 2-piece segmented glass fibre reinforced reflector with compact pedestal and is designed to be cost-effective while providing exceptional performance in a light weight package.



Field Upgradable to Ku

Features

- One button auto-pointing controller
- 2 Axis motion Ka-band
- Airline transportable
- Supports manual control when required
- Designed to work with the iNetVu® 7710 Controller
- Captive hardware / fasteners
- 1.2m offset, prime focus, 2-piece thermoset molded reflector
- Supports General Dynamic 1.2m reflector
- No tools required for assembly / disassembly
- Less than 15 minutes assembly time, one person job
- Elevation-over-azimuth pedestal provides excellent stiffness characteristics and convenience for the user
- ViaSat/Eutelsat compliant
- Compact packaging, ruggedized shipping cases
- Minimal maintenance required
- Can be easily converted to support Ku-band
- Standard 2 year warranty

Application Versatility

If you operate in Ka-band, the FLY-1202V Flyaway System is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Disaster Management, Military, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.



FLY-1202V

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna Size & Material	1.2m Glass fibre reinforced polyester ⁽¹⁾
Platform Geometry	Elevation over azimuth
Antenna optics	2-piece segmented
Optional	1-piece
Offset angle	16.97°
Azimuth	±175°
Elevation	5° to 90°
Polarization	Circular, auto-switching
Elevation deploy speed	Variable 6° / sec
Peaking speed	0.2° / sec

Environmental

Wind loading	
Operational	
No ballast or anchors	48 km/h (30 mph)
With ballast or anchors	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Rain	
Operational	10 cm/h
Survival	15 cm/h
Solar radiation	360 BTU / h / sq. ft

RF Interface

Radio mounting	Feed arm
Coaxial	RG6U F type

Electrical

Electrical interface	24VDC 8 Amp (Max.)
Rx & Tx cables	Single IFL, RG6 cable - 10 m (33 ft)
Control cables	
Standard	10m (33 ft) ext. cable
Optional	up to 60m (200 ft) available

Ka-Band

	Receive	Transmit
Frequency (GHz)	19.70 - 20.20	29.50 - 30.00
Midband Gain (± .2dB)	46.5	49.9
EIRP (Nominal)	54 dBW @ 29.75 GHz	
G/T (Nominal)	23.6 dB/K @ 19.95 GHz	
Antenna Noise Temp. (K)	20° EL= 107 / 40° EL= 89	
Sidelobe Envelope Co-Pol (dBi)		
1.5° < Θ < 20°	29-25 LogΘ	
20° < Θ < 26.3°	-3.5	
26.3° < Θ < 48°	32-25 LogΘ	
48° < Θ < 180°	-10 Typical	
Cross Polarization	-25 dB in 1dB contour	
Any angle of axis	-25 dB (Max.)	
Feed Interface	Type F	
VSWR	1.3:1 (Max.)	

Cases

Reflector case: 134.6 x 38.1 x 91.5 cm (53" x 15" x 36"); 46.6kg (103lbs)
AZ/EL case: 53.4 x 59.7 x 40.6 cm (21" x 23.5" x 16"); 37.9kg (83.5 lbs)
Tripod/feed case: 170.2 x 50.8 x 31.8 cm (67" x 20" x 12.5"); 38.3kg (84.5 lbs)
4-10U Rack Mount case (Optional): 74 x 51 x 72 cm (29" x 20" x 28"); 32 kg (70 lbs)

Shipping Weights & Dimensions

TBD

Note:

⁽¹⁾ Antenna based on General Dynamic

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

55

FLY-1202G



TECHNICAL SPECIFICATIONS

The new iNetVu® 1.2m Flyaway Ka-band Antenna System is a highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller and can be assembled in less than 15 minutes by one person. The antenna features a 2-piece segmented glass fibre reinforced reflector with compact pedestal and is designed to be cost-effective while providing exceptional performance in a light weight package.

Field Upgradable to Ku



Features

- One button auto-pointing controller
- 2 Axis motion Ka-band; 3 Axis optional
- Airline transportable
- Supports manual control when required
- Designed to work with the iNetVu® 7710 Controller
- Captive hardware / fasteners
- 1.2m offset, prime focus, 2-piece thermoset olded reflector
- Supports General Dynamic 1.2m reflector
- No tools required for assembly / disassembly
- Less than 15 minutes assembly time, one person job
- Elevation-over-azimuth pedestal provides excellent stiffness characteristics and convenience for the user
- Compliant with Avanti/Gilat Ka services
- Compact packaging, ruggedized shipping cases
- Minimal maintenance required
- Can be easily converted to support Ku-band
- Optional 3W & 5W transceivers; higher BUCs also supported
- Standard 2 year warranty

Application Versatility

If you operate in Ka-band, the FLY-1202G Flyaway System is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Disaster Management, Military, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.



FLY-1202G

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna Size & Material	1.2m Glass fibre reinforced polyester ⁽¹⁾
Platform Geometry	Elevation over azimuth
Antenna optics	2-piece segmented
Optional	1-piece
Offset angle	16.97°
Azimuth	±175°
Elevation	5° to 90°
Polarization	Circular, auto-switching
Elevation deploy speed	Variable 6° / sec
Peaking speed	0.2° / sec

Environmental

Wind loading	
Operational	
No ballast or anchors	48 km/h (30 mph)
With ballast or anchors	72 km/h (45 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Rain	
Operational	10 cm/h
Survival	15 cm/h
Solar radiation	360 BTU / h / sq. ft

RF Interface

Radio mounting	Feed arm
Feed	RG6 F type

Electrical

Electrical interface	24VDC 8 Amp (Max.)
Rx & Tx cables	2 RG6 cables
Control cables	
Standard	10m (33 ft) ext. cable
Optional	up to 60m (200 ft) available

Ka-Band

	Receive	Transmit
Frequency (GHz)		
3W-XRC	19.20 - 20.20	29.50 - 30.00
(Optional) 3W-XRF	17.80 - 20.20	29.00 - 30.00
(Optional) 4W - AN8025	17.70 - 20.20	29.00 - 30.00
(Optional) 4W - AN8023	17.70 - 20.20	28.10 - 29.10
Midband Gain (± .2dB)	46.5	49.9
EIRP (Nominal)	54 dBW @ 29.75 GHz	
G/T (Nominal)	23.6 dB/K @ 19.95 GHz	
Antenna Noise Temp. (K)	20° EL= 107 / 40° EL= 89	
Sidelobe Envelope Co-Pol (dBi)		
1.5° <Θ < 20°	29-25 LogΘ	
20° <Θ < 26.3°	-3.5	
26.3° <Θ < 48°	32-25 LogΘ	
48° <Θ < 180°	-10 Typical	
Cross Pol within 1dB contour	> 22 dB	> 22 dB
VSWR	1.3:1 (Max.)	

Ka-Band (R/O Circular)

	Receive
Frequency (GHz)	17.0 - 22.2
Feed Interface dual polarity	WR42

Cases

Reflector case: 134.6 x 38.1 x 91.5 cm (53" x 15" x 36"); 46.6kg (103lbs)
 AZ/EL case: 53.4 x 59.7 x 40.6 cm (21" x 23.5" x 16"); 37.9kg (83.5 lbs)
 Tripod/feed case: 170.2 x 50.8 x 31.8 cm (67" x 20" x 12.5"); 38.3kg (84.5 lbs)
 4-10U Rack Mount case (Optional): 74 x 51 x 72 cm (29" x 20" x 28"); 32 kg (70 lbs)

Shipping Weights & Dimensions

TBD

Note:

⁽¹⁾ Antenna based on General Dynamic/Skyware Global



FLY-1801



TECHNICAL SPECIFICATIONS

The iNetVu® FLY-1801 Antenna is a 1.8m highly portable, self-pointing, auto-acquire unit that is configurable with the iNetVu® 7710 Controller and can be assembled in less than 20 minutes. The antenna features a 6-piece carbon fibre reflector with compact pedestal and is designed to be cost-effective while providing exceptional performance in a light weight package.



Features

- 6-Piece Carbon Fibre Reflector
- One button, auto-pointing Controller acquires any Ku, C or X band satellite within 2 minutes
- 3 Axis motorization
- Supports manual control
- Captive Hardware/Fasteners
- No tools required for assembly
- Set-up time less than 20 minutes
- Designed to work with the iNetVu® 7710 Controller
- Leveling capability for uneven surfaces
- Standard 2 year warranty



Application Versatility

Whether you operate in Ku, C or X band, the 1.8m Flyaway system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Disaster Management, Military, Oil & Gas Exploration, Mining, Construction, Mobile Offices and Emergency Services.



FLY-1801



TECHNICAL SPECIFICATIONS

Mechanical

Reflector	1.8m offset feed, Carbon Fibre
Platform Geometry	Elevation over Azimuth
Deployment Sensors GPS Antenna	Compass $\pm 2^\circ$, Tilt Sensor $\pm 0.2^\circ$
F/D Ratio	0.80
Azimuth	Full 360° in overlapping, 200° sectors
Elevation	0° to 90°
Polarization	$\pm 95^\circ$
Elevation Deploy Speed	Variable 3° /sec, 2° /sec typ.
Azimuth Deploy Speed	Variable 5° /sec, 2° /sec typ.
Peaking Speed	0.2° /sec
Peaking Accuracy	$\pm 0.1^\circ$
Motor Voltage	24VDC 15 Amp (Max.)

Environmental

Wind loading	
Operational (no ballast)	40 km/h (25 mph)
Operational (with ballast)	72 km/h (45 mph)
Survival (with ballast)	120 km/h (75 mph)
Temperature	
Operational	-30° to 60° C (-22° to 140° F)
Survival	-40° to 65° C (-40° to 149° F)
Water Ingress Rating	IP-66

Electrical

Rx & Tx Cables	2 RG6 Cables
Control Cables	
Standard	10 m (33 ft) Extension Cable
Optional	Up to 60 m (200 ft) available

RF Interface

Radio Mounting	Feed arm
Coaxial	RG6U
Axis Transition	Rigid/Twist-Flex Waveguide
Electrical Interface	10 m (33 ft) ext. cables w/MIL connectors
VSWR	Rx 1.30:1 Tx 1.30:1

Physical

Transportable Cases:

Case 1: AZ Assembly: 47.7 x 50.8 x 68.6cm (18.8" x 20" x 27"); 40.2kg (89lbs)
 Case 2: Tripod Assembly: 52.1 x 154.5 x 34.3cm (20.5" x 61" x 13.5"); 36.4kg (80lbs)
 Case 3: EL Assembly & Feedboom Supports: 49.5 x 138.5 x 67.3cm (19.5" x 54.5" x 26.5"); 39.6kg (87.5lbs)
 Case 4: Feedboom Assembly & Reflector segments: 55.9 x 98.6 x 68.6cm (22" x 38.8" x 27"); 39.6kg (87.5lbs)
 Case 5: Controller (Optional): 4-10U Rack Mount : 74 x 51 x 72 cm (29" x 20" x 28"); 32 kg (70 lbs)
 Climate Control case also available

Optional Feeds:

Case 6: Ku-Linear POL & EL Actuator: 69.9 x 77.0 x 35.1cm (27.5" x 30.3" x 13.8"); 32.5kg (71.5lbs)
 Case 7: C-linear POL & EL Actuator: 75 x 75 x 48.3cm (29.5" x 29.5" x 19"); 46.2kg (102lbs)
 Case 8: C-Circular POL & Actuator: TBD

Shipping Weights & Dimensions

TBD

Antenna Bands

Transmit Power ⁽¹⁾	1 to 200 watt						1 to 500 watt	
	<i>Ku-Linear</i>		<i>C-Linear</i> ⁽³⁾		<i>C-Circular</i> ⁽³⁾		<i>X - Circular</i> ⁽³⁾	
	Receive	Transmit	Receive	Transmit	Receive	Transmit	Receive	Transmit
Frequency (GHz)	10.70 - 12.75 ⁽²⁾	13.75 - 14.50	3.40 - 4.20 ⁽²⁾	5.850 - 6.725	3.625-4.20 ⁽²⁾	5.85-6.425	7.25 - 7.75	7.90 - 8.40
Feed Interface	WR75	WR75	WR229	WR137 or Type N	WR229	Type N	WR112	WR112
INSAT Frequency Xpol (GHz)			4.50-4.80	6.275-7.025				
INSAT Frequency Copol (GHz)			4.50-4.80	6.724-7.025				
Efficiency	70%	70%						
Midband Gain (± 0.2 dB)	45.30	46.50	35.40	39.30	(± 0.4 dB) 35.4	39.5		
Antenna Noise Temp. (K)	10° EL = 60 / 20° EL = 53		10° EL = 43 / 20° EL = 38		10° EL = 55 / 20° EL = 50			
Sidelobe Envelope, Co-Pol (dBi)								
1.5° < Θ < 20°	29-25 Log Θ		2.5° < Θ < 20°	29-25 Log Θ	2.8° < Θ < 20°	29-25 Log Θ	DSCS Req	
20° < Θ < 26.3°	-3.5		20° < Θ < 26.3°	-3.5	20° < Θ < 26.3°	-3.5		
26.3° < Θ < 48°	32-25 Log Θ		26.3° < Θ < 48°	32-25 Log Θ	26.3° < Θ < 48°	32-25 Log Θ		
48° < Θ < 180°	-10 (Average)		48° < Θ < 180°	-10 (Average)	48° < Θ < 180°	-10 (Average)		
Cross-Polarization on Axis	- 35 dB	- 35 dB	- 30 dB	- 30 dB				
Within 1dB Beamwidth	-28 dB	- 28 dB	- 26 dB	- 26 dB				
Isolation (Port to Port)	30 dB	85 dB	30 dB	70 dB	30 dB	70 dB	≥ 90 dB	≥ 90 dB

Notes:

⁽¹⁾ Depending on size and weight of feed arm mounting limitation ⁽³⁾ Call your C-COM sales representative for availability

⁽²⁾ LNB PLL Type required with stability better than ± 25 KHz



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Please note this is a draft.

Specifications are subject to change

June 2022



MANPACKS

AUTOMATIC



TECHNICAL SPECIFICATIONS

MP-60-MOT



MP-80-MOT



MP-100-MOT



MP-60-MOT



TECHNICAL SPECIFICATIONS

The iNetVu® MP-60-MOT is a fully motorized, auto-acquire, 60cm carbon fiber manpack antenna. This robust and lightweight system will point to any programmed satellite with just the push of a button on the NEW iNetVu® 8020 Controller. C-COM's highly portable, multi-segment manpack can be hand-carried by one person and assembled in less than 10 minutes with no tools required.



Soft Case Solution (Standard)



8020 Controller



Features

- 60 cm 6-piece carbon fibre reflector
- Single Backpack Soft Case Solution (Rugged Hard Case Optional)
- Operates in Ku, Ka or X band
- Designed to work with the iNetVu® 8020 Controller
- Monitor and Control Via Front Panel display or Web Interface
- 2 or 3 Axis Motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ku-band satellite within 30 seconds
- Captive hardware / fasteners
- No tools required for assembly / disassembly
- Set-up time less than 10 minutes, one person job
- 1 Year Standard Warranty

Application Versatility

The MP-60-MOT ManPack system can be easily configured to provide quick access to satellite communications for any application that requires remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up; in vertical markets such as emergency response, disaster management, public safety, broadcasting, media and more.



MP-60-MOT

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	60 cm segmented carbon fibre
Number of Petals	6
Platform Geometry	Elevation over Azimuth
Antenna Optics	Centre Feed
Deployment Sensors	GPS antenna
	Compass $\pm 5^\circ$
	Tilt sensor $\pm 0.05^\circ$
Azimuth	360° Continuous
Elevation	5° - 90°
Polarization	$\pm 95^\circ$
Elevation Deploy Speed	Variable, 11°/sec typ.
Azimuth Deploy Speed	Variable 11°/sec typ.
Peaking Speed	11°/sec (steps in $\pm 0.01^\circ$)

Environmental

Wind loading	
Operational	
With Ballast/Anchors	45 km/h (28.1 mph)
Survival	
With Ballast/Anchors	72 km/h (45 mph)
Temperature	
Operational	-20° to 55° C (-4° to 131° F)
Survival	-30° to 60° C (-22° to 140° F)
IP Protection	IP66
Humidity	0-100% (non-condensing)

Case

Single Backpack Soft Case (Empty): 7.5 Kg (16.5 lbs)
 Size: 84 x 43.2 x 39.4 cm (33.0" x 17.0" x 15.5")
 Weight (Incl. Ku Antenna (1)): 21 Kg (46.2 lbs)
 Optional: Hard Case with Sling Load backpack (Empty): 16 Kg (35.3 lbs)
 Rugged Case Size: 72.4 x 50.8 x 33 cm (28.5" x 20" x 13")
 Weight (Including Antenna (1)): 28.5 Kg (62.8 lbs)

Electrical

DC Input: 24VDC @ 3A (RMS)
 AC/DC Adapter: Universal AC Input (100-277VAC) / 24VDC
 Power Consumption:
 Idle: 12W
 Operational (Max): 50W

Modem Compatibility

The DVB-S2/ACM Tuner is an integrated part of all ManPacks. It allows the iNetVu® system the option to find the satellite with and without the use of a satellite modem. Compact and adaptable, this high performance tuner is programmable to any DVB-S or DVB-S2/ACM frequency and allows the user to pre-configure specific satellite options.

Open AMIP

HNS - HT2500 (dual IFL)	Newtec - Dialog - MDM3310
Gilat - Skyedge IIc - Capricorn 4	UHP - 100/200
iDirect - Evolution - iQ200	

Ku-Band (Linear)

Transmit Power	1 to 200 watt	
Feed	2 Port XPol	
	Receive	Transmit
Frequency (GHz)	10.70- 12.75 ⁽²⁾	13.75 - 14.50
Optional Low Ku	10.70- 11.70 ⁽²⁾	12.75 - 14.50
Feed Interface	WR75	WR75 ⁽³⁾
Midband Gain ($\pm .2$ dBi)	35.70	37.20
Sidelobe Envelope Co-Pol (dBi)		
100 λ /D° < Θ < 7°	35-25 Log Θ	
7° < Θ < 9.2°	13.9	
9.2° < Θ < 48°	38-25 Log Θ	
48° < Θ < 180°	-4 Typical	
Cross-Polarization on Axis	>35 dB	
Within 1dB Beamwidth	>30 dB	
Tx/Rx Isolation	40 dB	85 dB
VSWR	<1.5:1	<1.5:1

Ka-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	19.20 - 21.20 ⁽²⁾	29.0 - 31.0
Midband Gain ($\pm .2$ dBi)	40.20	43.20
Polarization X-POL	LHCP/RHCP	
Feed Interface	WR-42	WR-28
VSWR	<1.5:1	<1.25:1
Isolation (dB)	>55	>55

X-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	7.25 - 7.75 ⁽²⁾	7.90 - 8.40
Midband Gain ($\pm .5$ dB)	32.10	32.70
Polarization X-POL	LHCP/RHCP	
Sidelobe Compliant with	DSCS Req.	
Feed Interface	WR-112	WR-112
VSWR	<1.25:1	<1.25:1
Isolation (dB)	>23	>23

Shipping Weights & Dimensions*

Single Backpack Soft Case :
 Size: 89 x 43.2 x 38.1 cm (35.0" x 18.5" x 17.0")
 Weight (Including Antenna ⁽¹⁾): 22.5Kg (49.6 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

⁽¹⁾ Weight indicated does not include BUC, LNB and Cables

⁽²⁾ LNB PLL Type required with stability better than ± 10 KHz

⁽³⁾ Maximum BUC dims supported: 9.8 cm x 9.8 cm x 4.2 cm (3.9" x 3.9" x 1.7"); 0.5Kg(1.1lbs)
 Larger BUCs must use quick disconnect flex waveguide/metric

C-COM
 SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

63

MP-80-MOT



TECHNICAL SPECIFICATIONS

The iNetVu® MP-80-MOT is a fully motorized, auto-acquire, 80cm carbon fiber manpack antenna. This robust and lightweight system will point to any programmed satellite with just the push of a button on the NEW iNetVu® 8020 Controller. C-COM's highly portable, multi-segment manpack can be hand-carried by one person and assembled in less than 10 minutes with no tools required.



8020 Controller

Soft Case Solution (Standard)

Features

- 80 cm 5-piece carbon fibre reflector
- Single Backpack Soft Case Solution (Rugged Hard Case Optional)
- Operates in Ku, Ka or X band
- Designed to work with the iNetVu® 8020 Controller
- Monitor and Control Via Front Panel display or Web Interface
- 2 or 3 Axis Motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ku-band satellite within 30 seconds
- Captive hardware / fasteners
- No tools required for assembly / disassembly
- Set-up time less than 10 minutes, one person job
- 1 Year Standard Warranty

Application Versatility

The MP-80-MOT ManPack system can be easily configured to provide quick access to satellite communications for any application that requires remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up; in vertical markets such as emergency response, disaster management, public safety, broadcasting, media and more.



MP-80-MOT

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	80 cm segmented carbon fibre
Number of Petals	5
Platform Geometry	Elevation over Azimuth
Antenna Optics	Centre Feed
Deployment Sensors	GPS antenna
	Compass $\pm 5^\circ$
	Tilt sensor $\pm 0.05^\circ$
Azimuth	360° Continuous
Elevation	5° - 90°
Polarization	$\pm 95^\circ$
Elevation Deploy Speed	Variable, 11°/sec typ.
Azimuth Deploy Speed	Variable 11°/sec typ.
Peaking Speed	11°/sec (steps in $\pm 0.01^\circ$)

Environmental

Wind loading	
Operational	
With Ballast/Anchors	45 km/h (28.1 mph)
Survival	
With Ballast/Anchors	72 km/h (45 mph)
Temperature	
Operational	-20° to 55° C (-4° to 131° F)
Survival	-30° to 60° C (-22° to 140° F)
IP Protection	IP66
Humidity	0-100% (non-condensing)

Case

Single Backpack Soft Case (Empty):	7.5 Kg (16.5 lbs)
Size:	84 x 43.2 x 39.4 cm (33.0" x 17.0" x 15.5")
Weight (Incl. Ku Antenna (1)):	21 Kg (46.2 lbs)
Optional: Hard Case with Sling Load backpack (Empty):	16 Kg (35.3 lbs)
Rugged Case Size:	72.4 x 50.8 x 33 cm (28.5" x 20" x 13")
Weight (Including Antenna (1)):	28.5 Kg (62.8 lbs)

Electrical

DC Input:	24VDC @ 3A (RMS)
AC/DC Adapter:	Universal AC Input (100-277VAC) / 24VDC
Power Consumption:	
Idle:	12W
Operational (Max):	50W

Modem Compatibility

The DVB-S2/ACM Tuner is an integrated part of all ManPacks. It allows the iNetVu® system the option to find the satellite with and without the use of a satellite modem. Compact and adaptable, this high performance tuner is programmable to any DVB-S or DVB-S2/ACM frequency and allows the user to pre-configure specific satellite options.

Open AMIP

HNS - HT2500 (dual IFL)	Newtec - Dialog - MDM3310
Gilat - Skyedge IIc - Capricorn 4	UHP - 100/200
iDirect - Evolution - iQ200	

Ku-Band (Linear)

Transmit Power	1 to 200 watt	
Feed	2 Port XPol	
	Receive	Transmit
Frequency (GHz)	10.70- 12.75 ⁽²⁾	13.75 - 14.50
Optional Low Ku	10.70- 11.70 ⁽²⁾	12.75 - 14.50
Feed Interface	WR75	WR75 ⁽³⁾
Midband Gain ($\pm .2$ dBi)	38.30	39.60
Sidelobe Envelope Co-Pol (dBi)		
100 λ /D° < Θ < 7°	35-25 Log Θ	
7° < Θ < 9.2°	13.9	
9.2° < Θ < 48°	38-25 Log Θ	
48° < Θ < 180°	-4 Typical	
Cross-Polarization on Axis	>35 dB	
Within 1dB Beamwidth	>30 dB	
Tx/Rx Isolation	40 dB	85 dB
VSWR	1.3:1	1.3:1

Ka-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	19.20 - 21.20 ⁽²⁾	29.0 - 31.0
Midband Gain ($\pm .2$ dBi)	42.60	45.70
Polarization X-POL	LHCP/RHCP	
Feed Interface	WR-42	WR-28
VSWR	<1.5:1	<1.25:1
Isolation (dB)	>55	>55

X-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	7.25 - 7.75 ⁽²⁾	7.90 - 8.40
Midband Gain ($\pm .5$ dB)	34.60	35.0
Polarization X-POL	LHCP/RHCP	
Sidelobe Compliant with	DSCS Req.	
Feed Interface	WR-112	WR-112
VSWR	<1.25:1	<1.25:1
Isolation (dB)	>23	>23

Shipping Weights & Dimensions*

Single Backpack Soft Case :	
Size:	89 x 43.2 x 38.1 cm (35.0" x 18.5" x 17.0")
Weight (Including Antenna ⁽¹⁾):	22.5Kg (49.6 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

⁽¹⁾ Weight indicated does not include BUC, LNB and Cables

⁽²⁾ LNB PLL Type required with stability better than ± 10 KHz

⁽³⁾ Maximum BUC dims supported: 9.8 cm x 9.8 cm x 4.2 cm (3.9" x 3.9" x 1.7"); 0.5Kg (1.1lbs)
Larger BUCs must use quick disconnect flex waveguide/metric

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

65

MP-100-MOT



TECHNICAL SPECIFICATIONS

The iNetVu® MP-100-MOT is a fully motorized, auto-acquire, 100cm carbon fiber manpack antenna. This robust and lightweight system will point to any programmed satellite with just the push of a button on the NEW iNetVu® 8020 Controller. C-COM's highly portable, multi-segment manpack can be hand-carried by one person and assembled in less than 10 minutes with no tools required.



Soft Case Solution (Standard)



8020 Controller



Features

- 100 cm 7-piece carbon fibre reflector
- Single Backpack Case Solution
- Operates in Ku, Ka or X band
- Designed to work with the iNetVu® 8020 Controller
- Monitor and Control Via Front Panel display or Web Interface
- 2 or 3 Axis Motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ku-band satellite within 30 seconds
- Captive hardware / fasteners
- No tools required for assembly / disassembly
- Set-up time less than 10 minutes, one person job
- 1 Year Standard Warranty

Application Versatility

The MP-100-MOT manpack system can be easily configured to provide quick access to satellite communications for any application that requires remote connectivity in a rugged environment. Ideally suited for applications that require a quick, simple set-up; in vertical markets such as emergency response, disaster management, public safety, broadcasting, media and more.



MP-100-MOT

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Reflector	100 cm segmented carbon fibre
Number of Petals	7
Platform Geometry	Elevation over Azimuth
Antenna Optics	Centre Feed
Deployment Sensors	GPS antenna
	Compass $\pm 5^\circ$
	Tilt sensor $\pm 0.05^\circ$
Azimuth	360° Continuous
Elevation	5° - 90°
Polarization	$\pm 90^\circ$ or LHCP/RHCP
Elevation Deploy Speed	Variable, 11°/sec typ.
Azimuth Deploy Speed	Variable 11°/sec typ.
Peaking Speed	11°/sec (steps in $\pm 0.01^\circ$)

Environmental

Wind loading	
Operational	
With Ballast/Anchors	45 km/h (28.1 mph)
Survival	
With Ballast/Anchors	72 km/h (45 mph)
Temperature	
Operational	-20° to 55° C (-4° to 131° F)
Survival	-30° to 60° C (-22° to 140° F)
IP Protection	IP66
Humidity	0-100% (non-condensing)

Case

Single Backpack Soft Case (Empty):	5.4 Kg (12.0 lbs)
Size:	84 x 51 x 41 cm (33.0" x 20.0" x 16.0")
Weight: 2-Axis (Incl. Antenna ⁽¹⁾):	22.8 Kg (50.2 lbs)
3-Axis (Incl. Antenna ⁽¹⁾):	24.5 Kg (54.0 lbs)
Optional: Hard Case Size:	94cm x 55.2cm x 41.6cm (37" x 21.75" x 16.37")
Weight (TBD)	

Electrical

DC Input:	24VDC @ 3A (RMS)
AC/DC Adapter:	Universal AC Input (100-277VAC) / 24VDC
Power Consumption:	
Idle:	12W
Operational (Max):	50W

Modem Compatibility

The DVB-S2/ACM Tuner is an integrated part of all ManPacks. It allows the iNetVu® system the option to find the satellite with and without the use of a satellite modem. Compact and adaptable, this high performance tuner is programmable to any DVB-S or DVB-S2/ACM frequency and allows the user to pre-configure specific satellite options.

Open AMIP

HNS - HT2500 (dual IFL)	Newtec - Dialog - MDM3310
Gilat - Skyedge IIc - Capricorn 4	UHP - 100/200
iDirect - Evolution - iQ200	

Ku-Band (Linear)

Transmit Power	1 to 200 watt	
Feed	2 Port XPol	
	Receive	Transmit
Frequency (GHz)	10.70- 12.75 ⁽²⁾	13.75 - 14.50
Optional Low Ku	10.70- 11.70 ⁽²⁾	12.75 - 14.50
Feed Interface	WR75	WR75 ⁽³⁾
Midband Gain ($\pm .2$ dBi)	40.10	41.40
Sidelobe Envelope Co-Pol (dBi)		
100λ/D° < Θ < 7°	35-25 Log Θ	
7° < Θ < 9.2°	13.9	
9.2° < Θ < 48°	38-25 Log Θ	
48° < Θ < 180°	-4 Typical	
Cross-Polarization on Axis	>35 dB	
Within 1dB Beamwidth	>30 dB	
Tx/Rx Isolation	40 dB	85 dB
VSWR	1.3:1	1.3:1

Ka-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	19.20 - 21.20 ⁽²⁾	29.0 - 31.0
Midband Gain ($\pm .2$ dBi)	44.50	47.60
Polarization X-POL	LHCP/RHCP	
Feed Interface	WR-42	WR-28
VSWR	<1.5:1	<1.25:1
Isolation (dB)	>55	>55

X-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	7.25 - 7.75 ⁽²⁾	7.90 - 8.40
Midband Gain ($\pm .5$ dB)	36.40	37.0
Polarization X-POL	LHCP/RHCP	
Sidelobe Compliant with	DSCS Req.	
Feed Interface	WR-112	WR-112
VSWR	<1.25:1	<1.25:1
Isolation (dB)	>23	>23

Shipping Weights & Dimensions*

Shipping Soft Case Size:	92 x 61 x 46cm (36.0" x 24.0" x 18.0")
Shipping Weight:	2-Axis (Incl. Antenna ⁽¹⁾): 27.7 Kg (61.0 lbs)
	3-Axis (Incl. Antenna ⁽¹⁾): 29.5 Kg (65.0 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Notes:

⁽¹⁾ Weight indicated includes 4W BUC, LNB and 5m(16ft) Cables

⁽²⁾ LNB PLL Type required with stability better than ± 10 KHz

⁽³⁾ Maximum BUC dims supported: 9.8 cm x 9.8 cm x 4.2 cm (3.9" x 3.9" x 1.7"); 0.5Kg(1.1lbs)
Larger BUCs must use quick disconnect flex waveguide





FMA's FIXED MOTORIZED ANTENNAS



FMA's

iNetVu®
by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

FMA-120



FMA-120Ka



FMA-180+



FMA-241



C-COM
SATELLITE SYSTEMS INC.

FMA-120



TECHNICAL SPECIFICATIONS

The iNetVu® 120 Fixed Motorised Antenna system is a self-pointing auto-acquire unit that can be mounted either as a permanent installation or on a portable fixed base. The antenna works seamlessly with the iNetVu® 7024C Controller.



Features

- 1.2m Offset, prime focus, thermoset-molded reflector
- Designed to work with the iNetVu® 7024C controller
- Works seamlessly with the world's most popular commercially available satellite modems
- 3 Axis motorization
- Supports manual control when required
- It is a cost effective solution for multi-satellite communication at any location
- One button, auto-pointing controller acquires any
- Ku-band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Eliminates costly repointing and network downtime due to adverse weather conditions or areas where ground shifts occur (earthquakes, landslides, mine blast zones, etc...)
- Can be easily relocated when mounted on a semi-permanent platform without the need for any specialized equipment
- Any compatible fixed installation can be easily converted and upgraded to a fully motorized system
- Supports Prodelin 1.2m antenna, Model 1132 / 1134
- System designed for relatively large BUCs, 9 kg (Max.) weight for RF electronics (BUC and LNB)
- 1 year warranty

Application Versatility

The FMA-120 system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Mining, Disaster Management, Construction, Mobile Offices, Emergency Services, Cellular Backhaul and many others.



FMA-120

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna Size	1.2m (48")
Reflector Material	Glass reinforced polyester SMC
Platform Type	Three axis Motorized, Galvanized steel
Antenna optics	Prime Focus, offset feed, Linear Orthogonal
Mast Size	2.5 SCH 80 pipe (3.00" OD)
Elevation Range	0° to 90°
Azimuth Range	340°
Polarization Range	± 90°

Environmental

Wind Loading	
Operational	72 km/h (45mph)
Survival	200 km/h (125mph)
Temperature	
Operational	-30°C to 55°C (-22°F to 130°F)
Survival	-40°C to 65°C (-40°F to 150°F)

Electrical

Elevation Motor	24VDC
Azimuth Motor	24VDC
Rx & Tx Cables	2 RG6 Cables -15m (50 ft) each
Control Cables	
Standard	15m (50 ft) Ext. Cable
Optional	Up to 60m (200 ft) available

Ku-Band

	Receive	Transmit
Frequency (GHz)	10.95 - 12.75 ⁽¹⁾	13.75 - 14.50
Optional	10.70 - 11.70	12.75 - 14.50
Midband Gain (± .2dB)	41.50	43.00
Antenna Noise Temp. (K)	20° EL= 46 / 30° EL= 24	
Sidelobe Envelope Co-Pol (dBi)		
1.5° <Θ < 20°	29-25 LogΘ	
20° <Θ < 26.3°	-3.5	
26.3° <Θ < 48°	32-25 LogΘ	
48° <Θ < 180°	-10 Typical	
Cross Polarization	-30 dB in 1dB contour	
Any angle of axis	-25 dB (Max.)	
Isolation (Port-to-Port)	35 dB	80 dB
Feed Interface	Type F or N	WR 75
VSWR	1.3:1 (Max.)	

Shipping Weights & Dimensions

1 Skid: 132 cm x 117 cm x 155 cm (52" x 46.1" x 61") 170 kg (374.8 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Note: ⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

71

FMA-120Ka



TECHNICAL SPECIFICATIONS

The iNetVu® FMA-120Ka, Fixed Motorised Ka-band Antenna system is a self-pointing auto-acquire unit that can be mounted either as a permanent installation or on a portable fixed base. The antenna works seamlessly with the iNetVu® 7024C Controller.




Features

- 1.2m Offset, prime focus, thermoset-molded reflector
- Designed to work with the iNetVu® 7024 Controller
- Works seamlessly with the world's most popular Ka-band commercially available satellite services (Exede, Tooway and iDirect)
- Supports 3W, 5W and eTria Transceivers
- 2 Axis motorization
- Supports manual control when required
- One button, auto-pointing controller acquires Ka-band satellites within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Eliminates costly repointing and network downtime due to inadvertent motion, satellite change, areas where ground shifts occur (earthquakes, landslides, mine blast zones, etc...)
- Can be easily relocated when mounted on a semi-permanent platform without the need for any specialized equipment
- Any compatible fixed installation can be easily converted and upgraded to a fully motorized system
- Supports ViaSat 1.2m Ka antenna, other Ka services can be supported as required
- Can be easily converted to support Ku-band
- 1 year warranty

Application Versatility

If you operate in Ka-band, the FMA-120Ka system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Mining, Disaster Management, Construction, Mobile Offices, Emergency Services, Cellular Backhaul and many others.



FMA-120Ka

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna Size	1.2m (48")
Reflector Material	Glass reinforced polyester SMC
Platform Type	Two axis Motorized, Galvanized steel
Antenna optics	Prime Focus, offset feed
Mast Size	2.5 SCH 80 pipe (3.00" OD)
Elevation Range	0° to 90°
Azimuth Range	340°
Polarization	Circular, Auto-switching

Environmental

Wind Loading	
Operational	72 km/h (45mph)
Survival	200 km/h (125mph)
Temperature	
Operational	-30°C to 55°C (-22°F to 130°F)
Survival	-40°C to 65°C (-40°F to 150°F)

Electrical

Elevation Motor	24VDC
Azimuth Motor	24VDC
Rx & Tx Cables	2 RG6 Cables -15m (50 ft) each
Control Cables	
Standard	15m (50 ft) Ext. Cable
Optional	Up to 60m (200 ft) available

Ka-Band

	Receive	Transmit
Frequency (GHz)	19.70 - 20.20	29.50 - 30.00
Midband Gain (±.2dB)	46.5	49.9
EIRP (Nominal)	54 dBW @ 29.75 GHz	
G/T (Nominal)	23 dB/K @ 19.95 GHz	
Antenna Noise Temp. (K)	20° EL= 107 / 40° EL= 89	
Sidelobe Envelope Co-Pol (dBi)		
1.5° < Θ < 20°	29-25 LogΘ	
20° < Θ < 26.3°	-3.5	
26.3° < Θ < 48°	32-25 LogΘ	
48° < Θ < 180°	-10 Typical	
Cross Polarization	-25 dB in 1dB contour	
Any angle of axis	-25 dB (Max.)	
Feed Interface	Type F	Type F
VSWR	1.3:1 (Max.)	

Shipping Weights & Dimensions

1 Skid: 132 cm x 117 cm x 155 cm (52" x 46.1" x 61") 170 kg (374.8 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

C-COM
SATELLITE SYSTEMS INC.

FMA-180+



TECHNICAL SPECIFICATIONS

The iNetVu® 180+ Fixed Motorised Antenna system is a self-pointing auto-acquire unit that can be mounted as a permanent installation. Works seamlessly with the auto-pointing iNetVu® 7024 Controller.



Features

- 1.8m Offset, prime focus, glass fibre SMC reflector
- Designed to work with the iNetVu® 7024 Controller
- Works seamlessly with the world's most popular commercially available satellite modems
- 2 Axis motorization, 3rd Axis (Polarization) optional
- Supports manual control when required
- It is a cost effective solution for multi-satellite communication at any location
- One button, auto-pointing controller acquires any Ku, C or X band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Eliminates costly repointing and network downtime due to inadvertent motion, satellite change, areas where ground shifts occur (earthquakes, landslides, mine blast zones, etc...)
- Can be easily relocated when mounted on a semi-permanent platform without the need for any specialised equipment
- Any compatible fixed installation can be easily converted and upgraded to a fully motorised system
- Supports GD 1.8m antenna, Model 1184
- System designed for 4W and higher BUCs. 10 kg (Max.) weight for RF electronics (BUC and LNB)
- 1Year Warranty

Application Versatility

The FMA-180+ system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Mining, Disaster Management, Construction, Mobile Offices and Emergency Services.



FMA-180+

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna size	1.8m (71")
Reflector Material	Glass reinforced polyester SMC
Platform Type	3 axis Motorized, Galvanized steel
Antenna optics	Prime Focus, offset feed
Mast size	3.5 SCH 40 pipe (4.0" OD)
Elevation range	0° to 90°
Azimuth Range	330° (± 165°)
Polarization Range	± 90°

Environmental

Wind loading	
Operational	80 km/h (50mph)
Survival	201 km/h (125mph)
Temperature	
Operational	-30°C to 55°C (-22°F to 130°F)
Survival	-40°C to 65°C (-40°F to 150°F)

Electrical

Elevation	24V
Azimuth	24V
Rx & Tx Cables	2 RG6 Cables -15m (50 ft) each
Control Cables	
Standard	15m (50 ft) Ext. Cable
Optional	Up to 70m (230 ft) available

Ku-Band

	Receive	Transmit
Operating Frequency (GHz)	10.70 - 12.75 ⁽¹⁾	13.75 - 14.50
(Optional)	10.70 - 11.70	12.75 - 14.50
Midband Gain (± .2dB)	45.00	46.50
Antenna Noise Temp. (K)	10° EL= 44 / 40° EL= 33	
Sidelobe Envelope Co-Pol (dBi)		
Mainbeam <Θ<7°	29-25 LogΘ	
7° <Θ< 9.2°	+8	
9.2° <Θ <48°	32-25 LogΘ	
48° <Θ <180°	-10 Ave.	
Cross Polarization	> -30 dB on axis	
Feed Interface	WR 75	WR 75
VSWR	1.3:1 (Max.)	

Note: ⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz

C-Band (Linear)

	Receive	Transmit
Operating Frequency (GHz)	3.625 - 4.20 ⁽¹⁾	5.845 - 6.725
INSAT Frequency (GHz)	4.50-4.80	6.725-7.025
Midband Gain (± .2dB)	35.50	39.50
Antenna Noise temp.(K)	10° EL= 56 / 40° EL=46	
Sidelobe Envelope Co-Pol (dBi)		
Mainbeam <Θ<7°	29-25 LogΘ	
7° <Θ< 9.2°	+8	
9.2° <Θ <48°	32-25 LogΘ	
48° <Θ <180°	-10 Ave.	
Cross Polarization	> -30 dB on axis	
Feed Interface	CPR 229 F	CPR 137 or type N
VSWR	1.3:1 (Max.)	

C-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	3.625 - 4.20 ⁽¹⁾	5.85 - 6.425
Midband Gain (± .2dB)	35.50	39.90
Antenna Noise Temp. (K)	10° EL=30 / 40° EL=20	
Sidelobe Envelope Co-Pol (dBi)		
Mainbeam <Θ<7°	29-25 LogΘ	
7° <Θ< 9.2°	+8	
9.2° <Θ <48°	32-25 LogΘ	
48° <Θ <180°	-10 Ave.	
Feed Interface	CPR 229 F	CPR 137 or type N
VSWR	1.3:1 (Max.)	

X-Band (Circular)

	Receive	Transmit
Operating Frequency (GHz)	7.25 - 7.75 ⁽¹⁾	7.90 - 8.40
Midband Gain (± .5dB)	40.90	41.60
Antenna Noise Temp. (K)	10° EL=43 / 30° EL=35	
Sidelobe Compliant with	DSCS Req.	
Feed Interface	WR-112	WR-112
VSWR	1.25:1	1.25:1
Isolation (dB)	20	20

Shipping Weights & Dimensions*

Pallet 1: FMA 1.8m Ku, C or X band System with 3rd axis motorization on skid
183 cm x 109 cm x 66 cm (72"x43"x26"); 195 Kg (430 lbs);
Pallet 2: FMA 1.8m Reflector on skid
208.3 cm x 208.3 cm x 35.6 cm (82"x82"x14"); 80.3 Kg (177 lbs);
System Net Weight: 145.2 kg (320 lbs)
Reflector Net Weight: 37.0 kg (81.5 lbs)

*The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

75

FMA-241



TECHNICAL SPECIFICATIONS

The iNetVu® 241 Fixed Motorised Antenna system is a 2.4m self-pointing auto-acquire unit that can be mounted as a permanent installation. Works seamlessly with the auto-pointing iNetVu® 7715 Controller.



Features

- 2.4m Offset, 4-piece Prime Focus, Glass Fiber SMC reflector
- Designed to work with the iNetVu® 7715 Controller
- Works seamlessly with the world's most popular commercially available satellite modems
- 2 Axis motorization, 3rd Axis (Polarization) optional
- It is a cost effective solution for multi-satellite communication at any location
- One button, auto-pointing controller acquires any Ku, C or X band satellite within 2 minutes
- Locates satellites using the most advanced satellite acquisition methods
- Eliminates costly repointing and network downtime due to inadvertent motion, satellite change, areas where ground shifts occur (earthquakes, landslides, mine blast zones, etc...)
- Can be easily relocated when mounted on a semi-permanent platform without the need for any specialised equipment
- Any compatible fixed installation can be easily converted and upgraded to a fully motorised system
- Supports Prodelin 2.4m antenna, Model 1244
- System designed for light weight BUCs up to 10 kg (Max.) weight for RF electronics (BUC and LNB)
- 1 Year Warranty

Application Versatility

The FMA-241 system is easily configured to provide instant access to satellite communications for any application that requires reliable and/or remote connectivity in a rugged environment. Ideally suited for industries such as Oil & Gas Exploration, Mining, Disaster Management, Construction, Mobile Offices and Emergency Services.



FMA-241

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

Mechanical

Antenna size	2.4m (8 ft)
Reflector Material	Glass reinforced polyester SMC
Platform Type	3 axis Motorized, Galvanized steel
Antenna optics	4-Piece Prime Focus, Offset Feed
Mast size	6" SCH 40 pipe (6.62" OD)
Elevation range	10° - 90°
Azimuth Range	330° (±165°)
Polarization Range	± 90°

Environmental

Wind loading	
Operational	80 km/h (50mph)
Survival	201 km/h (125mph)
Temperature	
Operational	-30°C to 55°C (-22°F to 130°F)
Survival	-40°C to 65°C (-40°F to 150°F)

Electrical

Elevation	24V
Azimuth	24V
Rx & Tx Cables	2 RG6 Cables -15m (50 ft) each
Control Cables	
Standard	15m (50 ft) Ext. Cable
Optional	Up to 60m (200 ft) available

Shipping Weights & Dimensions* (TBD)


Box 1: 162.6 cm x 109.2 cm x 66 cm (64" x 43" x 26") 154.5 kg (340 lbs)
 Box 2: 274.3 cm x 50.8 cm x 27.9 cm (108" x 20" x 11") 84 kg (185 lbs)
 Box 3: 149.9 cm x 149.9 cm x 104.1 cm (59" x 59" x 41") 163.6 kg (360 lbs)
 Total weight with skid: 402 kg (885 lbs)
 Estimated Net Weight (No boxes): 318 kg (700 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

Antenna Bands

Transmit Power Feed	1 to 400 watt 2 Port XPol							
	<i>Ku-Linear</i>		<i>C-Linear</i>		<i>C-Circular</i>		<i>X-Circular</i>	
	Receive	Transmit	Receive	Transmit	Receive	Transmit	Receive	Transmit
Frequency (GHz)	10.70 - 12.75 ⁽¹⁾	13.75 - 14.50	3.40 - 4.20 ⁽¹⁾	5.845 - 6.725	3.625 - 4.20 ⁽¹⁾	5.85 - 6.425	7.25 - 7.75 ⁽¹⁾	7.90 - 8.40
(Optional)	10.70 - 11.70	12.75 - 14.50	4.50-4.80	6.725-7.025				
Feed Interface	Type F or N	WR 75	CPR-229	N or CPR-137	CPR-229	N or CPR-137	WR-112	WR-112
Midband Gain Co-Pol (± 0.2dBi)	47.40	49.20	38.20	42.20	38.00	42.00	43.70	44.40
Antenna Noise Temp. (K)	10° EL= 51; 20° EL=48; 40° EL= 41		10° EL= 47; 20° EL=43; 40° EL= 43		10° EL= 53; 20° EL=49; 40° EL= 49		10° EL= 38; 20° EL=33; 40° EL= 29	
Sidelobe Envelope, Co-Pol (dBi)								
1.5°<Θ<20°	29 - 25 Logθ		29 - 25 Logθ		29 - 25 Logθ		DSCS Req.	
20°<Θ<26.3°	-3.5		-3.5		-3.5			
26.3°<Θ<48°	32-25 Log Θ		32-25 Log Θ		32-25 Log Θ			
θ > 48°	-10 (Typical)		-10 (Typical)		-10 (Typical)			
Cross-Polarization on Axis	> 30 dB	> 35 dB	> 30 dB	> 30 dB	> 15	> 17.7		
Within 1dB Beamwidth	> 25	> 26	> 27	> 27	> 15	> 17.7		
Tx/Rx Isolation	> 35 dB	80 dB	55 dB	80 dB	55 dB	75 dB	20 dB	20 dB
VSWR	1.5:1 (Max.)	1.3:1 (Max.)	1.3:1 (Max.)	1.3:1 (Max.)	1.3:1 (Max.)	1.3:1 (Max.)	1.25:1 (Max.)	1.25:1 (Max.)

Note: ⁽¹⁾ LNB PLL Type required with stability better than ± 25 KHz



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

Draft

June 2022



CONTROLLERS & ACCESSORIES



TECHNICAL SPECIFICATIONS

7000/24 Controller



7710 Controller



3000 Controller



BR400L



PowerSmart



Transportable Cases



Climate-Controlled AC Case



Transportable Skid



Enclosed Skid



Cables



7000/7024 Controller

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS



Online with the touch of a button

- Simple stand-alone one touch operation to find satellite and stow antenna
- Typical satellite acquisition time in less than 2 minutes
- Ideal for applications that require a quick, simple setup and reliable connection
- Internal DVB receiver provides modem independence
- Based on an embedded software solution

Features

- One touch stand-alone solution
- Front Panel Configurable
- Compatible with all iNetVu® mobile platforms
- Supports DVB-S and DVB-S2/ACM frequencies
- Optimal, high-precision antenna pointing
- Remote access and operation via Network, Web and other Interfaces
- Built-in motion and movement protection for safety
- Supports inclined orbit satellites
- Integrated with multiple modems
- Works with GPS and GLONASS Satellite Navigation Systems
- Works with OpenAMIP
- Global Position Information available for external devices
- Easy to configure and operate
- Interoperable with Uplogix's remote management appliances
- Supported languages by GUI interface: English, Arabic, Russian, Swedish, Chinese (Mandarin, Traditional) and Spanish
- Standard 2 year warranty

Modem Compatibility*

The DVB-S2/ACM Tuner is an integrated part of all iNetVu® 7000/7024 Controllers. It allows the iNetVu® system the option to find the satellite with and without the use of a satellite modem. Compact and adaptable, this high performance tuner is programmable to any DVB-S or DVB-S2/ACM frequency and allows the user to pre-configure specific satellite options.

HughesNet
DW 6000/7000
HN 7000/7000S
HN 9200/9260
HN 9400/9460
HN 9600/9800
HX 50/90/100/200/250/260
HT 1100/2000/2500

ipstar
IPX-5100/9200
IPX-3200

Gilat
Skyedge II/IP
Skyedge II/Pro/Access
Skyedge IIc (Standalone)

iDirect
iNFINITI 3000/5000/7000 Series
Evolution X5/X7/IQ200
Velocity - X7

Comtech/ Radyne
CDM-600L/570L/625/840
DMD 20/DMD 20 LBST
SkyWire MDX420

Romantis/UHP/Eastar
UHP-1000/200

STM
SatLink 1000/1910/2000/2900

Newtec
MDM-3100 (standalone)
MDM 3X00/MDM2510/MDM6000

Viasat
Linkstar II/IV/S2/S2A
Surfbeam II/PRO
Surfbeam II Auto-acquire
Tooway/PRO

Paradise
Evolution/ Quantum Series

Tachyon

CI-1300
Ruggedized RMG

Spacebridge (Advantech)
E7000 (S5100)
U7400 (S5420)

* Please contact C-COM if you require more information about modem compatibility as these may change without further notice



Optional Beacon Receiver

An optional 19" rack mount iNetVu® Beacon Receiver (BR300L) is available and has been integrated to work with the iNetVu® Controllers. This external self contained compact unit detects the power density of the satellite beacon (930MHz - 2300MHz) and is connected to the controller via an RS232 serial port interface.

Optional GPS/GLONASS Compass

An optional GPS/Glonass based compass is available and has been integrated with the iNetVu Controllers. This external compact device can be fitted on roof of vehicle beside the iNetVu platform to provide accurate vehicle heading within 1 degree irrespective of the surrounding magnetic field. The precise heading of the antenna translates to a smaller search window and hence faster satellite acquisitions. Interfaces to the controller via RS-232 serial port.

Interfaces

GPS Antenna	SMA Connector
RF Rx In / Rx Out	Type F Connector
Sensor Input	DB26 Connector
Motor Control	9-Pin Circular AMP Connector
Network Interface	RJ45 Connector
USB 2.0 (Full Speed)	USB Type B Receptacle
Serial Port	DB9 Female Connector

Electrical

Model	7000C	7024C
Universal AC Input	100- 240VAC, 2.2 - 1.1A 50/60 Hz	100- 240VAC, 2.2 - 1.1A 50/60 Hz
DC Input	12VDC @ 15A (Max.)	24VDC @ 8A (Max.)
Elevation Power	12VDC @ 15A (Max.)	24VDC @ 8A (Max.)
Azimuth Power	12VDC @ 10A (Max.)	24VDC @ 6A (Max.)
Polarization Power	12VDC @ 3A (Max.)	24VDC @ 2A (Max.)
Idle Power Consumption	12VDC @ 1A	24VDC @ 0.5A
LNB Power	Disable, 13V, 14V, 18V, 19V @ 500 mA (Max.)	

Physical

Dimensions	19" 1U Rack Mountable Unit
Standard	H: 4.5cm (1.75") W: 43cm (17.1") D: 28cm (11.0")
Weight	4.5kg (9.9 lbs)

Environmental

Operating Temperature	-20°C to +60°C (-4°F - 140°F)
Storage Temperature	-40°C to +70°C (-40°F - 158°F)

Shipping dimensions

Shipping box: 54 cm x 44 cm x 20 cm (21" x 17" x 8"); 7kg (15 lbs)
Optional - See Transportable Cases datasheet

Certification

FCC Part 15 Class B, CE & VCCI Approvals for Emission & Immunity Standards



613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

7000/7024 Controller



TECHNICAL SPECIFICATIONS

SEVEN methods of finding satellite with the iNetVu® 7000/7024 controller

- DVB Search - Searches directly for any DVB-S or DVB-S2 (ACM) carrier on the target satellite and peaks on it.
- DVB Search, Opposite Polarity – Searches for DVB-S or DVB-S2 carrier in the opposite polarity on target satellite, then rotates polarization axes and enables transmitter if modem signal attained.
- DVB Search, Reference Satellite - Searches for a DVB-S or DVB-S2 carrier on ANY configured reference satellite then moves to the target satellite and peaks on modem signal.
- RF Automatic Search – The system will stop and search for modem signal when it senses an increase in RF energy received through the DVB tuner as it passes by the target satellite. If the modem signal is found, the system will begin the peak process.
- RF Override Search – The user specifies an RF Threshold such that the system stops when it reaches an area above the threshold and looks for modem signal to peak on.
- Beacon Receiver – The Controller works seamlessly with the optional iNetVu® Beacon Receiver by searching for a specified beacon frequency and then peaks on it (search gain level can be adjusted).
- Auto-Deploy Method - Peaks on a reference satellite then uses precise pointing mechanism to locate the target satellite, even when no modem RF or beacon signal is available to peak on.

The iNetVu® 7000/7024 Controller

- Can be operated from a PC application using the USB port Via its web interface, it can be operated remotely or locally over a network connection
- Can be completely configured from the front panel with a password protected configuration menu
- Protects the platform and its components from damage, using current levels and sensor readings. It includes motion and movement protection as well
- Provides automatic re-peeking if signal degradation occurs
- Works correctly even when deployed while on an incline (in any direction) of up to 15°
- Can search for both DVB-S and DVB-S2/ACM carriers
- Supports full automatic and manual control of the iNetVu® Platform
- Allows the users to select from multiple speed levels for both azimuth and elevation
- Allows the system to operate unattended in remote locations
- Is able to upload the recorded log information (Maximum of 12 hours) from the controller to the PC for troubleshooting
- Supports full tracking of Inclined Orbit satellites by both signal strength and timed function
- Is capable of powering the LNB with 13-19 Volts, selectable in software
- Provides the option of saving the settings to a configuration file that can be used to configure additional controllers with the same configuration parameters
- Works seamlessly with Uplogix Remote Management Appliances
- Supports both GPS and GLONASS Satellite Navigation Systems
- Supports Electronic Flux Gate Compass for increased speed of acquisition
- Designed and manufactured to the highest standards of quality and reliability by C-COM
- Supports all iNetVu® Mobile antenna platforms



7710 Controller

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS



Online with the touch of a button

- Simple stand-alone one touch operation to find satellite & stow antenna
- Typical satellite acquisition time in less than 2 minutes
- Ideal for applications that require a quick, simple setup and reliable connection
- Internal DVB receiver provides modem independence
- Based on an embedded software solution

Features

- Simultaneous multi-axis movements
- Easy to configure and operate; one touch stand-alone solution
- Single control cable connection to iNetVu® platform
- Front Panel Configurable
- Only works with iNetVu® mobile platforms which are equipped with 7720 on-board module
- Supports DVB-S and DVB-S2/ACM frequencies
- Optimal, high-precision antenna pointing
- Remote access and operation via Network, Web and other Interfaces
- Supports inclined orbit satellites
- Integrated with multiple modems
- Works with GPS and GLONASS Satellite Navigation Systems
- Works with OpenAMIP
- Global Position Information available for external devices
- Interoperable with Uplogix's remote management appliances
- Supported languages by GUI interface: English, Arabic, Russian, Swedish Chinese (Mandarin, Traditional) and Spanish
- Standard 2 year warranty

Modem Compatibility*

The DVB-S2/ACM Tuner is an integrated part of all iNetVu® 7710 Controllers. It allows the iNetVu® system the option to find the satellite with and without the use of a satellite modem. Compact and adaptable, this high performance tuner is programmable to any DVB-S or DVB-S2/ACM frequency and allows the user to pre-configure specific satellite options.

HughesNet
HN 7000/7000S
HN 9200/9260
HN 9400/9460
HN 9600/9800
HX 50/90/100/200/250/260
HT 1100/1200/1300/2000/2500

Comtech/ Radyne®
CDM-600L/570L/625/840
DMD 20/DMD 20 LBST
SkyWire MDX420

Viasat
Surfbeam II/PRO
Tooway/PRO

Gilat
Skyedge II/IP
Skyedge II/Pro/Access
Skyedge IIc (Standalone)

Ipstar®
IPX-5100/9200
IPX-3200

Novelsat
NS3000

iDirect
Evolution X5/X7/IQ200

Newtec
MDM-3100 (standalone)
MDM 3X00/MDM2510/MDM6000

Romantis/UHP/Eastar®
UHP-1000/200

STM
SatLink 1000/1910/2000/2910

DATUM
M7

Spacebridge (Advantech)
U7400 (S5420)

* Modem Integration underway. Please contact C-COM if you need more information about modem compatibility as these may change without further notice.

Optional Beacon Receiver

An optional 19" rack mount iNetVu® Beacon Receiver (BR300L) is available and has been integrated to work with the iNetVu® Controllers. This external self contained compact unit detects the power density of the satellite beacon (930MHz - 2300MHz) and is connected to the controller via an RS232 serial port interface.

Optional GPS/GLONASS Compass

An optional GPS/Glonass based compass is available and has been integrated with the iNetVu Controllers. This external compact device can be fitted on roof of vehicle beside the iNetVu platform to provide accurate vehicle heading within 1 degree irrespective of the surrounding magnetic field. The precise heading of the antenna translates to a smaller search window and hence faster satellite acquisitions. Interfaces to the controller via RS-232 serial port.

Interfaces

RF Rx In	Type F Connector
RF Rx Out	Type F Connector
7720 Port	Circular Metal Connector
Network Interface	RJ45 Connector
USB 2.0 (Full Speed)	USB Type B Receptacle
Serial Port	DB9 Female Connector
DC In	Circular Amp Connector
GPS	SMA Connector

Electrical

LNB Power	Disable, 13V, 14V, 18V, 19V @ 500 mA (Max.)
Universal AC Input	100 - 240VAC, 4.0 - 2.0A, 50/60 Hz
DC Input	24VDC @ 15A (Max.)
Idle Power Consumption	24VDC @ 1A

Physical

Dimensions	19" 1U Rack Mountable Unit
Standard	H: 4.5cm (1.75") W: 43cm (17.1") D: 28cm (11.0")
Weight	2.7kg (6.0lbs)

Environmental

Operating Temperature	-20°C to +60°C (-4°F - 140°F)
Storage Temperature	-40°C to +70°C (-40°F - 158°F)

Certification

FCC Part 15 Class A, CE for Emission & Immunity Standards

Shipping dimensions

Shipping box: 54 cm x 44 cm x 20 cm (21" x 17" x 8"); 7kg (15 lbs)
Optional Cases - See Transportable Cases datasheet

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

82

7710 Controller




TECHNICAL SPECIFICATIONS

SEVEN methods of finding satellite with the iNetVu® 7710 Controller

- DVB Search - Searches directly for any DVB-S or DVB-S2 (ACM) carrier on the target satellite and peaks on it.
- DVB Search, Opposite Polarity – Searches for DVB-S or DVB-S2 carrier in the opposite polarity on target satellite, then rotates polarization axes and enables transmitter if modem signal attained.
- DVB Search, Reference Satellite with modem - Searches for a DVB-S or DVB-S2 carrier on ANY configured reference satellite then moves to the target satellite and peaks on modem signal.
- DVB Search, Reference Satellite without modem - Peaks on a reference satellite then uses precise pointing mechanism to locate the target satellite, even when no modem RF or beacon signal is available to peak on.
- RF Automatic Search – The system will stop and search for modem signal when it senses an increase in RF energy received through the DVB tuner as it passes by the target satellite. If the modem signal is found, the system will begin the peak process.
- RF Override Search – The user specifies an RF Threshold such that the system stops when it reaches an area above the threshold and looks for modem signal to peak on.
- Beacon Receiver – The iNetVu® Controller works seamlessly with the optional iNetVu® Beacon Receiver by searching for a specified beacon frequency and then peaks on it (search gain level can be adjusted).

The iNetVu® 7710 Controller

- Can be operated from a PC application using the USB port or network port
- Has built in web interface that can be operated remotely or locally over a network connection
- Can be completely configured from the front panel with a password protected configuration menu
- Protects the platform and its components from damage, using current levels and sensor readings. It includes motion and movement protection as well
- Provides automatic re-peeking if signal degradation occurs
- Works correctly even when deployed while on an incline (in any direction) of up to 15°
- Can search for both DVB-S and DVB-S2/ACM carriers
- Supports full automatic and manual control of the iNetVu® Platform
- Allows the users to select from multiple speed levels for both azimuth and elevation movements
- Allows the system to operate unattended in remote locations
- It is able to upload the recorded log information (Maximum of 12 hours) from the controller to the PC for troubleshooting
- Supports full tracking of Inclined Orbit satellites by both signal strength and timed function
- Is capable of powering the LNB with 13-19 Volts, selectable in software
- Provides the option of saving the settings to a configuration file that can be used to configure additional controllers with the same configuration parameters
- Works seamlessly with Uplogix Remote Management Appliances
- Supports both GPS and GLONASS Satellite Navigation Systems
- Supports Electronic Flux Gate Compass for increased speed of acquisition
- Designed and manufactured to the highest standards of quality and reliability by C-COM
- Only works with iNetVu® Mobile antenna platforms which are equipped with 7720 on board module



3000 Controller

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS



The new iNetVu® 3000C hand-held manual controller has the same look and feel as a video game controller. It allows you to operate the platform without having the auto-pointing controller or PC attached to it. In addition, this controller makes it possible to operate the iNetVu® mobile antenna at variable speeds.

A useful tool for conducting demonstrations, installations, testing or for emergency backup situations.

Features

- Jog control on 3 axis
- Compatible with all iNetVu® Mobile Platforms
- Ability to raise, stow, polarize and move the iNetVu® Mobile Platform during demos, installations, trouble-shooting etc.
- Compact, ergonomic case design
- LCD display for operation and limits status
- 10-speed operation
- Directly attachable to any 12VDC / 24VDC power supply
- Enhanced operation with feedback control
- Standard 2 year warranty

Note: ⁽¹⁾ Required for new iNetVu® 24V based models

⁽²⁾ Required for new iNetVu® 24V based models equipped with 7720
Works with combined PWR/CAN external cable

⁽³⁾ Cables length up to 50ft available

Electrical

Power Input	
3000C-12	12VDC @ 15 Amp (Max.)
3000C-24 ⁽¹⁾	24VDC @ 8 Amp (Max.)
3000C-24-CAN ⁽²⁾	24VDC @ 8 Amp (Max.)
Motor ⁽³⁾	9 pin; 4.5m (15 ft) cable (optional)
Sensor ⁽³⁾	DB-26; 4.5m (15 ft) sensor cable (optional)

Environmental

Operating temperature	-20° to +60° C (-4° to +140° F)
Storage temperature	-40° to +70° C (-40° to +158° F)
Standard	RoHS compliant

Mechanical

Dimensions	W: 8 cm (7") H: 13 cm (5") D: 5 cm (2")
Weight	500 gm (1 lbs)

Shipping Dimensions

56 cm x 51 cm x 13 cm (22" x 20" x 5"), 3.7 kg (8 lbs)

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

84

Beacon Receiver BR400L

iNetVu®
by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu® BR400L 19" rack mount Beacon Receiver is a high performance unit designed to track the power density of a satellite beacon in real time. It supplies a DC voltage output that is linearly proportional to the strength of the beacon signal. The BR400L has been specifically designed to work seamlessly with all iNetVu® controllers and antenna platforms.



System

Input Frequency	950 - 2200 MHz
Pre-detection Bandwidth	±100kHz
Input Power Level	- 105 dBm (Min.) to -20 dBm (Max.)
Frequency Tuning	10 KHz steps
Threshold	C/N ₀ ≤ 40 dBc/Hz
Input Impedance	75 Ohm (Optional 50 Ohm) ⁽¹⁾
Input Connector	Type F, Female STD (N-type Female Optional)
Frequency Stability	± 1.0 ppm
AGC Voltage	0 to +10 VDC
Signal Stability	≤ 0.2dB
Phase Noise	-97 dBc/Hz@10kHz
M & C	RS-232 @ 19200BPS
M & C Connector	DB-9, Male
Locking/Capture Time	4ms (Typical)
Streaming	DB-9, Female, (optional)

Environmental

Operating Temperature	-20° to +60° C
Storage Temperature	-40° to +80° C
Humidity	90% RH non-condensing

Physical

Size	4.5 cm (1.75") H; 34 cm (13.5") D 48 cm (19") W
Weight	5 kg (11lbs)
Primary Power	100-240 VAC 50/60Hz, 6.5A Autosensing
Power Consumption	≤ 2.5W

Certification

Complies with FCC Part 15 Class B, EN 55022 Class B
CE Approvals for Emission & Immunity Standards

Shipping dimensions

Receiver box:
54 cm x 44 cm x 20 cm (21" x 17" x 8"), 6.3 kg (14 lbs)

Note: ⁽¹⁾ For 50 Ohm/N-Type please order BR400L-N (SMA Type is also available)

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

85

TECHNICAL SPECIFICATIONS

The PowerSmart 2480 has been designed to provide 24 / 48 VDC or 110 / 220 VAC power to external amplifiers / BUCs, and includes features to support Monitor and Control (M&C) functions for several products. Most DC / AC powered BUCs, SSPAs and TWTAs can be integrated with the PowerSmart 2480, for an efficient and convenient hardware solution to provide POWER plus M&C control to an outdoor transmitter unit.



Features

- 19 inch 1U rack mount unit
- Amplifier functions such as TX Enable / Disable and operational status can be monitored and controlled from a convenient operator control panel. ⁽¹⁾
- The amplifier manufacturer's software can typically be operated from a PC platform through the configurable port, over RS232, RS485 or SNMP interface as required.
- Enabling the Transmit function, monitoring BUC faults and the presence of 10 MHz reference on the IFL, verifying output power level and other common functions along with the rack mount format make the PowerSmart 2480 a value-added solution to higher-powered VSAT applications.
- Configuration parameters, onboard statistics and fault information can be accessed via the amplifier's control interface (if available) through a convenient data port on the panel.
- Optional support for Bias-T, DC Blocker, MUX-T with 10 MHz clock, all in one convenient rack mount enclosure.
- Standard 2-Year Warranty

Note:

⁽¹⁾ Listed features are BUC dependent. Some front panel features related to M&C control may not be supported by some BUC manufacturers. Please inquire for further clarifications.

Application Versatility

The iNetVu® PowerSmart 2480 is ideal for applications where a VSAT transmitter / amplifier requires more power than a satellite modem can provide over the TX output. This is typical for larger Block Up Converters (BUC) or Power Amplifiers (SSPA, TWTAs etc.) that supply over 8 Watts RF output power.

TECHNICAL SPECIFICATIONS

Environmental

Operational Temperature	-20° C to +60° C (-4° F to 140° F)
Storage Temperature	-40° C to +85° C (-40° F to 185° F)
Humidity	10 - 95% RH

Physical

Dimensions	W: 48.3 cm (19") D: 36.2 cm (14") H: 4.5 cm (2")
Weight	6.3 kg (14 lbs)

Bias-T Thruplexer (Optional)

C-COM standard	L-Band and 10 MHz pass (not generated)
C-COM Mux-T	Provides 10 MHz Reference Generation Capability L-Band pass clock, plus DC / DC Block

Output

Model	PS-2480A	PS-2480B	PS-2480C
Voltage	48VDC	24VDC	110 / 220VAC
Rated Current	10 Amp	20 Amp	6.5A / 115VAC 3.5A / 230VAC
Rated Power	480 W	480 W	

Input

Voltage Range	85 - 264VAC
Frequency Range	47 - 63 Hz
AC Current	6.5A / 115VAC 3.5A / 230VAC

Front Panel Switches

Power	ON / OFF
BUC Control ⁽¹⁾	Enable / Disable transmitter

Compatibility

Supports most AC / DC Powered BUC in the market

PC Interface

DB9 on front panel used to access BUC Software via PC

PC Interface

RS-232	BUC / AMP dependent - PS-2480 Adaptable / configurable
RS-485	BUC / AMP dependent - PS-2480 Adaptable / configurable
SNMP	BUC / AMP dependent - PS-2480 Adaptable / configurable

* RS-232 / RS-485 interfaces are physically interchangeable and don't require separate power source

Certifications

FCC, CE, QPS

Transportable Cases

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

iNetVu® 1200 2-Cases, 1-Piece Reflector:




Major Features

- Available in Attractive Black-Coloured ATA style Cases
- High-grade Aluminum Extrusion Frames
- Durable Plastic and Plywood Laminate Panels
- Water-resistant Flat Surface with Drains
- Closed Cell Foam Padding
- Unique L-Shaped Interlocking Covers
- High-Strength Latches, Corners, and Recessed Handles

External Dimensions (All Heights Include Wheels)

Model Type	(L x W x H)	Weight [cases only]	Total Weight ⁽²⁾ [case + platform]
iNetVu® Ka-75V	34 x 155 x 84 cm (13.5" x 61" x 33")	54.5 kg (120 lbs)	107 kg (235 lbs)
iNetVu® Ka-98 V/G/H	47 x 183 x 109 cm (18.5" x 72" x 43")	79.5 kg (175 lbs)	133.5 kg (294 lbs)
iNetVu® 980+	172 x 111 x 74 cm (68" x 44" x 29")	68 kg (150 lbs)	160 kg (353 lbs)
iNetVu® 1200: 2-Case, 1-pc Reflector			
Platform Unit Case	178 x 76 x 74 cm (70" x 30" x 29")	63 kg (139 lbs)	141 kg (311 lbs)
Reflector Unit Case ⁽¹⁾	130 x 23 x 145 cm (51.5" x 9" x 57")	29 kg (63.5 lbs)	45.5 kg (100 lbs)
iNetVu® 1202 2-Case, 1-pc Reflector			
Platform Unit Case:	211 x 45 x 65 cm (83" x 17.8" x 25.8")	65.9 kg (145 lbs)	147.9 kg (325 lbs)
Reflector Unit Case:	127 x 20 x 122 cm (50" x 8" x 48")	29.5 kg (65 lbs)	45.5 kg (100 lbs)

Note: ⁽¹⁾ This case does not have wheels
Weights and dimensions are subject to change without notice





Transportable Cases

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

iNetVu® Controller Rackmount Case

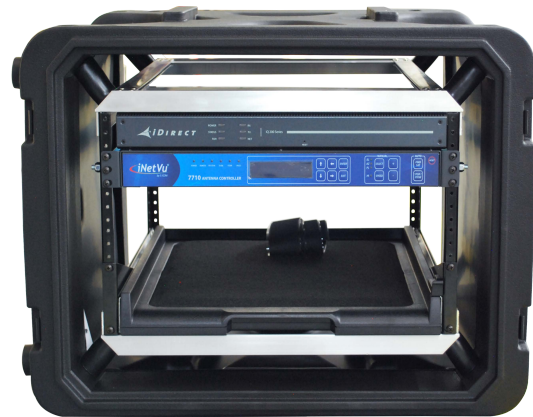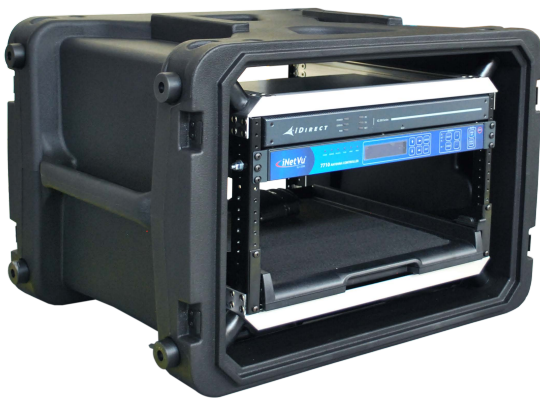

Controller Transportable Cases

Model Type	(W x H x L)	Weight [cases only]	Total Weight [Case + Controller]
iNetVu® 7000/7024/7710 Controller	(Comes with detachable end covers)		
4U 19" Rack Case ⁽¹⁾ :	69 x 40 x 70.5 cm (27" x 16" x 28")	18.1 kg (40 lbs)	22.6kg (50 lbs)
6U	74 x 51 x 72 cm (29" x 20" x 28")	26 kg (57 lbs)	30.5 kg (67 lbs)
8U: Optional	77 x 59 x 74 cm (30" x 23" x 29")	26.8 kg (59 lbs)	31.3 kg (69 lbs)
10U:	74 x 66 x 72 cm (29" x 26" x 28")	31.8 kg (70 lbs)	36.3 kg (80 lbs)
12U:	76 x 74 x 76 cm (30" x 29" x 30")	31 kg (68 lbs)	37.5 kg (82.7 lbs)



Climate-Controlled AC Case



TECHNICAL SPECIFICATIONS

The iNetVu® Climate-Controlled AC Case is precisely engineered, high performance combining the strength of aircraft grade aluminum with exceptional value. Patented by a high strength tubular valance and investment cast corner lugs provide unrivaled protection.



Features

- Designed for easy access from front and back
- Stackable for convenient storage and shipment
- Shock mounted standard 19" Rackmounted Case
- 4U Case holds payloads up to 150 lbs (68 Kg)
- Sizes range - 4U, 6U, 8U, 10U, 12, 14U
- Depths from 24" – 30"
- Conveniently packaged for OEM's to re-brand and re-ship
- Various colors available
- Different cooling capacity available
- Optional thermal electric cooling & heating

Specifications

Rack Width:	STD 19"
Rack Height:	4U / 7.0"
Rack Depth:	24"
Hole Configuration:	E.I.A. Universal Round Hole Pattern
Climate Control:	Power cable on cool side ⁽¹⁾ One ⁽¹⁾ , Horizontal Mounted Closed Loop A/C System - Cooling Capacity: 400 BTU Thermal Electric Cooling 220 Volt (Available in 110 V) Integrated Drip Pan for horizontal mounting configuration
Other:	½" Foam Insulated, Holes punched on sides as required
A/C Inputs:	120/240VAC 1.8A/0.9A

Physical

Climate-controlled case 4U (empty, with no cables or devices)	L: 37" (940mm) H: 13" (330mm) Weight: 63lbs (28.6kg)	W: 24" (610mm)
---	--	----------------

Shipping Weights & Dimensions*

TBD

⁽¹⁾ Power cable of the cooling unit can be on the cool side (powered from inside case) or from the hot side (power cable comes outside the case and plugs to an external source)



Transportable Skid 980+/Ka-98X



TECHNICAL SPECIFICATIONS

The iNetVu Transportable Skid is a robust transportable base which is designed to support the iNetVu 980+ and Ka-98X antenna system. The skid can be transported using forklifts or hoists making it possible to rapidly deploy the antenna system without the need to mount it on a trailer or a vehicle.



(Shown with the iNetVu 980+ antenna system and shock absorbers)

Feature

- Welded aluminum construction is rigid, lightweight & robust
- Easily handled by forks from pallet trucks and warehouse lift-trucks to large outdoor vehicles
- Fork access from all 4 sides
- Easily hoistable
- Antenna can be quickly mounted/demounted
- Ships fully assembled for very fast integration and deployment
- Optional shock absorbers to greatly reduce road damage
- Extra strongpoints that accommodate a rack case and generator for self-contained antenna deployment
- Optional cable spool

Physical - 980+

Skid w/ system (with shocks)	122 cm x 192 cm x 83 cm (48.0" x 75.6" x 32.7")
Weight: Skid only	TBD
Weight: Skid w/ system	TBD

Note: ⁽¹⁾

The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



Shipping Weights & Dimensions ⁽¹⁾

Skid w/ system + lid: 122 cm x 192 cm x 83 cm
(48.0" x 75.6" x 32.7"), TBD
Lid : TBD
Controller + Cables (30ft): 18.1 kg (40 lbs)
Total shipping weight of Skid w/ lid, system, controller + cables:
TBD



Transportable Skid 1200/1202

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS

The iNetVu Transportable Skid is a robust transportable base which is designed to support the iNetVu 1200 and 1202 antenna system. The skid can be transported using forklifts or hoists making it possible to rapidly deploy the antenna system without the need to mount it on a trailer or a vehicle.



(Shown with the iNetVu 1200 antenna system and shock absorbers)

Feature

- Welded aluminum construction is rigid, lightweight & robust
- Easily handled by forks from pallet trucks and warehouse lift-trucks to large outdoor vehicles
- Fork access from all 4 sides
- Easily hoistable
- Antenna can be quickly mounted/demounted
- Ships fully assembled for very fast integration and deployment
- Optional shock absorbers to greatly reduce road damage

Physical - 1202

Skid w/ system (with shocks)	146 cm x 218 cm x 58 cm (57.5" x 85.9" x 22.8")
Weight: Skid only	78.9 kg (174 lbs)
Weight: Skid w/ system	160.9 kg (355 lbs)



Physical - 1200

Skid w/ system (without shocks)	146 cm x 218 cm x 66.7 cm (57.5" x 85.9" x 26.25")
Skid w/ system (with shocks)	146 cm x 218 cm x 71.7 cm (57.5" x 85.9" x 28.25")
Weight: Skid only	78.9 kg (174 lbs)
Weight: Skid w/ system	171.5 kg (378 lbs)

Shipping Weights & Dimensions ⁽¹⁾

Skid w/ system + lid: 146 cm x 218 cm x 83 cm
(57.5" x 85.9" x 32.7"), 235 kg (518 lbs)
Lid : 45.4 kg (100 lbs)
Controller + Cables (30ft): 18.1 kg (40 lbs)
Total shipping weight of Skid w/ lid, system, controller + cables:
235.5 kg (519 lbs)

Note: ⁽¹⁾

The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

Enclosed Skid 1200/1202



TECHNICAL SPECIFICATIONS

The iNetVu Transportable Enclosed Skid is a robust transportable enclosure which is designed to support the iNetVu 1200 and the 1202 antenna system. The Enclosed Skid can be transported using forklifts or hoists making it possible to rapidly deploy the antenna system without the need to mount it on a trailer or a vehicle. It also allows for stackability for easier space management & warehousing.



Feature

- Welded aluminum construction is rigid, lightweight & robust
- Easily handled by forks from pallet trucks and warehouse lift-trucks to large outdoor vehicles
- Fork access from all 4 sides
- Easily hoistable
- Antenna can be quickly mounted/demounted
- Ships fully assembled for very fast integration and deployment
- Stackable up to 3 units
- One person operation
- Shock absorbers to reduce road damage

Physical

Enclosed Skid w/ system	148 cm x 218 cm x 79 cm (58.3" x 85.9" x 31.1")
Weight - Enclosed Skid w/ system:	245.9 kg (542 lbs)
Weight - Empty Enclosed Skid:	153.3 kg (338 lbs)

Shipping Weights & Dimensions*

Enclosed Skid w/ system & packaging: 148 cm x 218cm x 79 cm
(58.3" x 85.9" x 31.1"), 252.7 kg (557 lbs)
Controller + Cables (30ft): 18.1 kg (40 lbs)

* The shipping weights/dims can vary for particular shipments depending on actual system configuration, quantity, packaging materials and special requirements



Cables

iNetVu®

by C-COM Satellite Systems Inc.

TECHNICAL SPECIFICATIONS



Motor Cable



Sensor Cable



Splitter Cable

The iNetVu® product line offers a wide range of cables to address the needs of its resellers. The iNetVu® standard configuration includes four types of cables:

External Motor Cable - 8 conductor cable

- 14 AWG / 16 AWG / 18 AWG
- Metalized AMP 9 Pin to AMP 9 Pin connectors
- 10m (33 feet)
- Weight: 1.1 kg (2.5 lbs)

External Sensor Cable - 25 conductor cable

- 24 AWG
- Metalized AMP 16 Pin to DB26 connector
- 10m (33 feet)
- Weight: 1.1 kg (2.5 lbs)

External Transmit Cable (TX) - RG6 Co-axial cable

- F-Type connectors
- 75 ohm
- 10m (33 feet)
- Weight: 0.5 kg (1 lbs)

RX Cable Splitter - 2 to 1 Splitter

- F-Type connectors
- 75 ohm
- 10 m (33 feet)
- Weight: 0.5 kg (1 lbs)

Modem Cable - RG6 Co-axial cable

- F-Type connectors
- 75 ohm
- 1 m (3 feet)

Controller Cable - RG6 Co-axial cable

- F-Type connectors
- 75 ohm
- 1 m (3 feet)

Note: The external cables are also offered in sets of 15m (50 feet), 30m (100 feet), 45m (150 feet) and 60m (200 feet). You can also order the TX cable in 50 ohm with a N-Type connector and the RX cable with a 50 ohm and a N-Type connector.

C-COM
SATELLITE SYSTEMS INC.

613-745-4110 | 1-877-463-8886 (1-877-iNetVu6)
www.c-comsat.com

Specifications are subject to change

June 2022

VERTICAL MARKETS



- Oil & Gas Exploration
- SNG (Satellite News Gathering)
- Military
- Cellular Backhaul
- Homeland Security
- Mobile Medical Services (Telemedicine)
- Emergency Response
- Disaster Relief
- Mining
- Construction
- Mobile Education (Bookmobiles)
- Mobile Offices
- Mobile Banking
- Recreation Vehicles



Antenna Approvals



Ka-74G

"Approved on Eutelsat Konnect Services"



Ka-75V

"Authorized for use on ViaSat Exede® Enterprise and on KA-SAT NEWSPOTTER NEWSGATHERING service by Eutelsat"



FLY-75V

"Authorized for use on KA-SAT NEWSPOTTER NEWSGATHERING service by Eutelsat"



Ka-98V

Eutelsat Type Approved for Broadband Services



1202

Characterized with Eutelsat



Ka-75V

"Authorized for use on ViaSat Exede® Enterprise and on KA-SAT NEWSPOTTER NEWSGATHERING service by Eutelsat"



FLY-75V

"Authorized for use on KA-SAT NEWSPOTTER NEWSGATHERING service by Eutelsat"



Ka-1202V



Ka-98G

"Avanti Approved & Thor7 Type Approved; Field Upgradeable to Ku-band"



Ka-98H/Jup 980+

"Approved for operation on Hughes JUPITER System"



Ka-98G

"Avanti Approved & Thor7 Type Approved; Field Upgradeable to Ku-band"



FLY-98G

"Thor7 Type Approved and Compliant for use on Avanti Hylas Ka Satellite Services"



OPTUS

981



1200



CONTROLLERS



iNetVu® 7000/7024



iNetVu® 7710

HughesNet
DW 6000/7000
HN 7000/7000S
HN 9200/9260
HN 9400/9460
HN 9600/9800
HX 50/90/100/200/250/260
HT 1100/2000

ViaSat
Linkstar II/IV/S2/S2A
Surfbeam II/PRO
Surfbeam II Auto-acquire
Tooway/PRO

iDirect
iNFINITI 3000/5000/7000 Series
Evolution X5/X7

Gilat
Skyedge II/IP
Skyedge II/Pro/Access
Skyedge IIc (Standalone)

Comtech/ Radyne
CDM-600L/570L/625/840
DMD 20/DMD 20 LBST
SkyWire MDX420

Ipstar
IPX-5100/9200
IPX-3200

Romantis/UHP/Eastar
UHP-1000/200

Newtec
MDM-3100 (standalone)
MDM 3X00/MDM2500

STM
SatLink 1000/1910/2000/2900

Paradise
Evolution/ Quantum Series

Tachyon
CI-1300
Ruggedized RMG

Spacebridge
E7000
U7400

HughesNet
HN 7000/7000S
HN 9200/9260
HN 9400/9460
HN 9600/9800
HX 50/90/100/200/250/260
HT 1100/1200/1300/2000

ViaSat
Surfbeam II/PRO
Tooway/PRO

iDirect
Evolution X5/X7

Gilat
Skyedge II/IP
Skyedge II/Pro/Access
Skyedge IIc (Standalone)

Comtech/ Radyne*
CDM-600L/570L/625/840
DMD 20/DMD 20 LBST
SkyWire MDX420

Ipstar*
IPX-5100/9200
IPX-3200

Romantis/UHP/Eastar*
UHP-1000/200

Newtec
MDM-3100 (standalone)
MDM 3X00/MDM2500

STM
SatLink 1000/1910/2000/2910

Novelsat
NS3000

DATUM
M7

* Modern Integration underway. Please contact C-COM if you need more information about modern compatibility as these may change without further notice.

Eutelsat

Ka-75V (Ka) 7024C
Ka-75V-KASAT (Ka) 7024C
FLY-75V (Ka) 7710
Ka-98V (Ka) 7710
1202 (Ku) 7710

ViaSat

Ka-75V (Ka) 7024C
FLY-75V (Ka) 7710
Ka-1202V (Ka) 7710

Avanti

Ka-98H (Ka) 7710
Ka-98G (Ka) 7710

Hughes (HNS)

Ka-98H/JUP (Ka) 7710
980/980+ (Ku) 7024C

Thor7

Ka-98G (Ka) 7710
FLY-98G (Ka) 7710

Optus

981 (Ka) 7024C

Hispasat

1200 (Ku) 7000

TECHNICAL SPECIFICATIONS

Drive-Away Antennas

Models ⇄ Features ↓	Ka-75V	980+	981	Ka-98 G V		1200	1202 w/pod	1500	1501	1801
Band	Ka	Ku (Ka Upgradable)	Ku	Ka	Ka	Ku / X	1202 Ku (Ka Upgradable)	Ku, C-Linear, C-Circular	Ku, C-Linear, C-Circular	Ku, C-Linear, C-Circular
Deployed Height (mm)	1260	1510	1481	1510	1510	1676	1650	1800	1800	2480/2550
Stowed Height (mm)	300	350	300	300	300	488	340	490	490	670/500
Total Weight (Kg)	52	54	54	54	54	92.5	88	83.2	TBD	162/185
Max. RF (BUC/LNB) Platform weight (Kg)	5	5	5	5	5	10	15	15	15	11/15
Max. RF, BUC Dims (LxWxH/inches)	3W Custom	10 x 6.75 x 3.4	12 x 7.5 x 5.5 w/pod: 10 x 7.5 x 5.5	3W Custom	4W Custom	19.0 x 9.5 x 5.5	12.0 x 15.2 x 5.8	19. x 9.5 x 5.5	12.0 x 15.2 x 5.8	1800+-19.0 x 9.75 x 8.0 1801: 19.0 x 9.0 x 7.5
Reflector	ViaSat 75 Ka	Prodelin 1984/1985	Skyware 98	Skyware 98 Ka	Skyware 98 Ka	Prodelin 1132/1134	Skyware 125	Carbon Fibre	Carbon Fibre	Skyware 183
Elevation (degrees)	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 78	0 to 90	0 to 75	0 to 90	0 to 80/0 to 90
Polarization (+/- degrees)	N/A	90	90	Auto or 45 (LHCP/RHCP)	Auto or 45 (LHCP/RHCP)	90	95	90	95	90
Frequency Rx (GHz)	18.30 - 20.20	10.95-12.75	10.70 - 12.75	19.20 - 20.20	18.30 - 20.20	Ku:10.95 -12.75 X: 7.25 - 7.75	10.70 -12.75	Ku: 10.70 -12.75 C- Linear: 3.40 - 4.20 C- Circular: 3.625 - 4.20	Ku: 10.70 -12.75 C- Linear: 3.625 - 4.20 C- Circular: 3.625 - 4.20	Ku: 10.70 -12.75 C- Linear: 3.40 - 4.20 C- Circular: 3.625 - 4.20
Frequency Tx (GHz)	28.10 - 30.0	13.75 -14.50	13.75 - 14.50	29.50 - 30.00	28.10 - 30.00	Ku:13.75-14.50 X: 7.90 - 8.40	13.75 -14.50	Ku: 13.75 -14.50 C- Linear: 5.85 - 6.725 C- Circular: 5.85 - 6.425	Ku: 13.75 -14.50 C- Linear: 5.85 - 6.425 C- Circular: 5.85 - 6.425	Ku: 13.75 -14.50 C- Linear: 5.85 - 6.725 C- Circular: 5.85 - 6.425
Midband Gain (Rx, Tx)	41.40, 44.50	39.80, 41.30	39.70, 41.20	43.50, 46.60	43.50, 46.60	Ku: 41.50, 43.0 X: 37.40, 38.10	41.80, 43.30	Ku: 43.70, 45.00 C- Linear: 33.40, 37.20 C- Circular: 33.30, 37.10	Ku: 43.70, 45.00 C- Linear: 33.40, 37.20 C- Circular: 33.30, 37.10	Ku: 45.30, 46.80 C- Linear: 35.40, 39.30 C- Circular: 35.40, 39.50
Wind Deployed (km/h)	160	160	160	160	160	112	112	112	112	112
Wind Stowed (km/h)	225	225	225	225	225	225	225	225	225	225
Survival Temp. (°C)	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65
Operational, Wind (km/h)	72	72	72	72	72	72	75	72	72	72
Operational, Temp. (°C)	-30 to 55	-30 to 55	-30 to 55	-30 to 55	-30 to 55	-32 to 55	-30 to 55	-30 to 55	-30 to 55	-32 to 55
Controller	7024C	7024C	7710/7024C	7710	7710	7000C	7710	7000C	7710	7000C/7710
Standard Cables (75 Ohm) (50 Ohm -Opt.)	CB-7024-10 10m (33 ft)	CB-7024-10 10m (33 ft)	CB-7710-10/ CB-7024-10 10m (33 ft)	CB-7710-10-2 10m (33 ft)	CB-7710-10-1 10m (33 ft)	CB-7000-30-MIL 9.1m (30 ft)	1202 Ku: CB-7710-10-2 1202 Ka: CB-7710-10-1 10m (33 ft)	CB-7000-30-MIL 9.1m (30 ft)	CB-7710-10-MIL-2 10 m (33 ft)	CB-7000-30-MIL-18 9.1m (30 ft) CB-7710-10-MIL-2 10 m (33 ft)
Optional Cable Lengths (up to)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-45m (33-150 ft)
Warranty	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years

TECHNICAL SPECIFICATIONS

Fly-Aways								ManPack		
Models ⇄ Features ↓	FLY-74G	FLY-75V	FLY-981	FLY-98 G/V/H	FLY-1202 Ka: G/V	ACFLY-1200	FLY-1801	MP-60-MOT	MP-80-MOT	MP-100-MOT
Band	Ka	Ka	Ku	Ka	Ku / X Ka (G/V)	Ku	Ku/C	Ku / Ka / X	Ku / Ka / X	Ku / Ka / X
Deployed Height(mm)	Approx 1200	1325	1660	G: 1660 V: 1580 H: 1580	1875	1580	2690	900	1110	1300
Total Weight (Kg)	64	64	64	64	137	64	226	21	21	21.5
Max. RF (BUC/LNB) Platform weight(Kg)	5	5	5	5	15	5	15	1.2	1.2	1.2
Max. RF, BUC Dims (LxWxH/inches)	TBD	3W	2 - 40W	G/V: 3W Custom H: 2W Custom	12 x 8 x 6	10 x 8 x 4.5	19 x 12 x 6.5	3.9 x 3.9 x 1.7	3.9 x 3.9 x 1.7	3.9 x 3.9 x 1.7
Reflector	TBD	Skyware 75 Ka	Skyware Global 98	Skyware Global 98	GD SMC	Carbon Fibre	Carbon Fibre	Carbon Fibre 6 segments	Carbon Fibre 5 segments	Carbon Fibre 7 segments
Elevation (degrees)	0 to 90	0 to 90	0 to 90	0 to 90	5 to 90	10 to 90	0 to 90	5 to 90	5 to 90	5 to 90
Pol (+/- degrees)	Circular, RH or LH	Circular Auto-switching	90	G: Circular ±45 V: Circular Auto-switching H: Circular ±45 Manual	Ku: 95 X: 45 (LHCP/RHCP) Ka-G: (LHCP/RHCP) Ka-V: N/A	95	95	Ku: 95 Ka: LHCP/RHCP X: LHCP/RHCP	Ku: 95 Ka: LHCP/RHCP X: LHCP/RHCP	Ku: 95 Ka: LHCP/RHCP X: LHCP/RHCP
Frequency Rx (GHz)	17.80 - 20.20	18.30 - 20.20	10.70 - 12.75	G/H: 19.20 - 20.20 V: 18.30 - 20.20	Ku: 10.70 - 12.75 X: 7.25 - 7.75 Ka-G: 19.20 - 20.20 Ka-V: 18.30 - 20.20	10.70 - 12.75	Ku: 10.70 - 12.75 C-Lin: 3.40 - 4.20 C-Cir: 3.625 - 4.20	Ku: 10.70 - 12.75 Ka: 19.20 - 21.20 X: 7.25 - 7.75	Ku: 10.70 - 12.75 Ka: 19.20 - 21.20 X: 7.25 - 7.75	Ku: 10.70 - 12.75 Ka: 19.20 - 21.20 X: 7.25 - 7.75
Frequency Tx (GHz)	29.00 - 30.00	28.10 - 30.0	13.75 - 14.50	G/H: 29.50 - 30.00 V: 28.10 - 30.00	Ku: 13.75 - 14.50 X: 7.90 - 8.40 Ka-G: 29.50 - 30.00 Ka-V: 28.10 - 30.00	13.75 - 14.50	Ku: 13.75 - 14.50 C-Lin: 5.850 - 6.725 C-Cir: 5.85 - 6.425	Ku: 13.75 - 14.50 Ka: 29.0 - 31.0 X: 7.90 - 8.40	Ku: 13.75 - 14.50 Ka: 29.0 - 31.0 X: 7.90 - 8.40	Ku: 13.75 - 14.50 Ka: 29.0 - 31.0 X: 7.90 - 8.40
Midband Gain (Rx, Tx)	41.6 @19.2 GHz, 45.3 @29.0 GHz	41.40, 44.50	39.70, 41.20	43.50, 46.60	Ku: 41.80, 43.30 X: 37.20, 37.80 Ka-G/V: 46.5, 49.9	41.50, 43.00	Ku: 45.30, 46.50 C-Lin: 35.40, 39.30 C-Cir: 35.4, 39.50	Ku: 35.70, 37.20 Ka: 40.20, 43.20 X: 32.10, 32.70	Ku: 38.30, 39.60 Ka: 42.60, 45.70 X: 34.60, 35.0	Ku: 40.10, 41.40 Ka: 44.50, 47.60 X: 36.40, 37.0
Wind Deployed (km/h)	100 w/ballast	100 w/ballast	100 w/ballast	100 w/ballast	145 w/ballast	50 w/ballast	120 w/ballast	72 w/ballast	72 w/ballast	72 w/ballast
Survival Temp. (°C)	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-40 to 65	-30 to 60	-30 to 60	-30 to 60
Operational Wind (km/h)	72 w/ballast	50 no ballast 72 w/ ballast	50 no ballast 72 w/ ballast	50 no ballast 72 w/ ballast	48 no ballast 72 w/ ballast	50w/ballast	72 w/ballast	25 no ballast 45 w/ ballast	25 no ballast 45 w/ ballast	25 no ballast 45 w/ ballast
Operational, Temp. (°C)	-30 to 60	-30 to 60	-30 to 60	-30 to 60	-30 to 60	-30 to 55	-30 to 55	-20 to 55	-20 to 55	-20 to 55
Controller	7710	7710	7710	7710	7710	7024C	7710	8020	8020	8020
Stand. Cables (75 Ohm) (50 Ohm- Opt.)	CB-7710-10-1 10m (33 ft)	CB-7710-10-1 10m (33 ft)	CB-7710-10-2 10m (33 ft)	CB-7710-10-2 10m (33 ft)	CB-7710-10-2 10m (33 ft)	CB-FLY-AC-30 10m (33 ft)	CB-7710-10-2 10m (33 ft)	TBD	TBD	TBD
Opt. Cable Lengths (up to)	N/A	N/A	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	TBD	TBD	TBD
Warranty	2 years	2 years	2 years	2 years	2 years	1 year	1 year	1 year	1 year	1 year

TECHNICAL SPECIFICATIONS

Fixed Motorized				
Models ⇄ Features ↓	FMA-120 Ka	FMA-120	FMA-180+	FMA-240
Band	Ka	Ku	Ku	Ku, C-Linear, C-Circular
Deployed Height(mm)	N/A	N/A	N/A	N/A
Total Weight (Kg)	N/A	N/A	N/A	N/A
Max. RF (BUC/LNB) Platform weight(Kg)	5	10	10	10
Max. RF, BUC Dims (LxWxH/inches)	4W Custom	Any	Any	Any
Reflector	Glass reinforced polyester SMC	Skyware 123	Glass reinforced polyester SMC	Glass reinforced polyester SMC
Elevation (degrees)	0 to 90	10 to 90	10 to 90	10 to 90
Pol (+- degrees)	Circular, Auto-switching	90	90	90
Frequency Rx (GHz)	19.70 - 20.20	10.95 - 12.75	Ku: 10.95-12.75 C-Linear: 3.625-4.20 C-Circular: 3.625-4.20 X-Band: 7.25-7.75	Ku: 10.70-12.75 C-Linear: 3.625-4.20 C-Circular: 3.625-4.20
Frequency Tx (GHz)	29.50 - 30.00	13.75 - 14.50	Ku: 13.75-14.50 C-Linear: 5.845-6.725 C-Circular: 5.85-6.425 X-Band: 7.90-8.40	Ku: 13.75-14.50 C-Linear: 5.925-6.725 C-Circular: 5.85-6.425
Midband Gain (Rx, Tx)	46.50, 49.90	41.50, 43.00	Ku: 47.40-49.20 C-Linear: 38.20, 42.20 C-Circular: 38.00, 42.00 X-Band: 40.90, 41.60	Ku: 47.40-49.20 C-Linear: 38.20, 42.20 C-Circular: 38.00, 42.00
Wind Deployed (km/h)	200	200	200	200
Survival Temp. (°C)	-40 to 65	-40 to 65	-40 to 65	-40 to 65
Operational Wind (km/h)	72	72	72	72
Operational, Temp. (°C)	-30 to 60	-30 to 60	-30 to 60	-30 to 60
Controller	7024C	7024C	7024C	7024C
Stand. Cables (75 Ohm) (50 Ohm- Opt.)	CB-FMA-1200-50-F 15m (50 ft)	CB-FMA-1200-50-F 15m (50 ft)	CB-FMA-1800-50-F 15m (50 ft)	15m (50 ft)
Opt. Cable Lengths (up to)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)	10-60m (33 - 200 ft)
Warranty	1 year	1 year	1 year	1 year